



solavanti lighting



PERFORMANCE¹⁰

LTS[®]
LIGHT & LUMINAIRES

Ascona



Ascona 622

Imola



Imola 624



Imola XL 628

Monza



Monza Duo 629



Monza 630



Monza Eco 631

Twin



Twin 632

Match




Match500 634

Arena




Arena 635

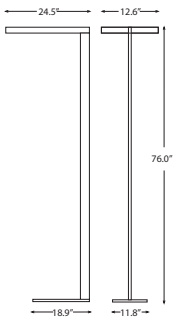

- ☑ free-standing luminaire for direct-indirect illumination
- ☑ available with automatic sensor or dimming
- ☑ luminaire unit and stand rod brought out of center made from aluminium die-cast, base made from metal
- ☑ decorative white flashed opal glasses
- ☑ dimming version: continuous dimming from 10 – 100 %
- ☑ sensor version: daylight control with automatic cut-off function and active control with motion detector
- ☑ ECG integral
- ☑ ready to plug-in to mains, connection cable (length: 196.9")
- ☑ color: aluminium polished, silver, white

■ **Ascona | free-standing luminaire**



LM	Wattage	⚡	Order No.
 TC-L / 2G 11	4 x 55 W	ECG switch on/off ECG dimming ECG automatic sensor	ASC10.4550 ASC10.4550 DIM ASC10.4550 SENSO



NEW

Ascona

The Ascona is a new free standing luminaire diving direct and indirect light for workplace applications. High quality materials, clean lines and the latest lighting technique ensure that the Ascona provides a desirable ambience in any workplace.






- ☑ free-standing luminaire for direct-indirect illumination, light distribution: 14% direct, 86% indirect
- ☑ optional with automatic sensor, dimming or 2-step switch
- ☑ luminaire unit made from reinforced polymide
- ☑ light diffuser with micro perforation made from metal backed with matt foil made from polycarbonate
- ☑ stand rod made from anodised aluminium
- ☑ base made from high-grade die-cast with fine structure
- ☑ dimming version: continuous dimming from 10 – 100 %

- ☑ sensor version: daylight control with automatic cut-off function and active control with motion detector
- ☑ ECG integral
- ☑ ready to plug-in to mains, connection cable (length: 196.9")
- ☑ color combinations:
light head: carbongrey, astrosilver, white, grey metallic (effect)
stand rod: silver, white, chrome gloss

Imola | free-standing luminaire




LM	Wattage		Order No.	LVK	lb	
☑	TC-L / 2G 11	4 x 55 W	ECG 2-step switch	IMO 4550	552	26.6
			ECG dimming	IMO 4550 DIM	552	26.6
			ECG automatic sensor	IMO 4550 SENSO	552	29.5

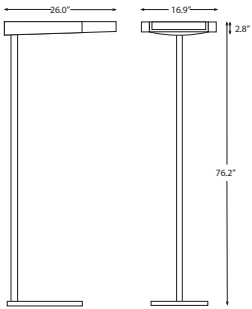

Accessories Cover plain:
Clear cover:
Cover perforated:


Illumination
IMO 455 AG direct
IMO 455 AK indirect
IMO 455 AP less indirect light share

Imola

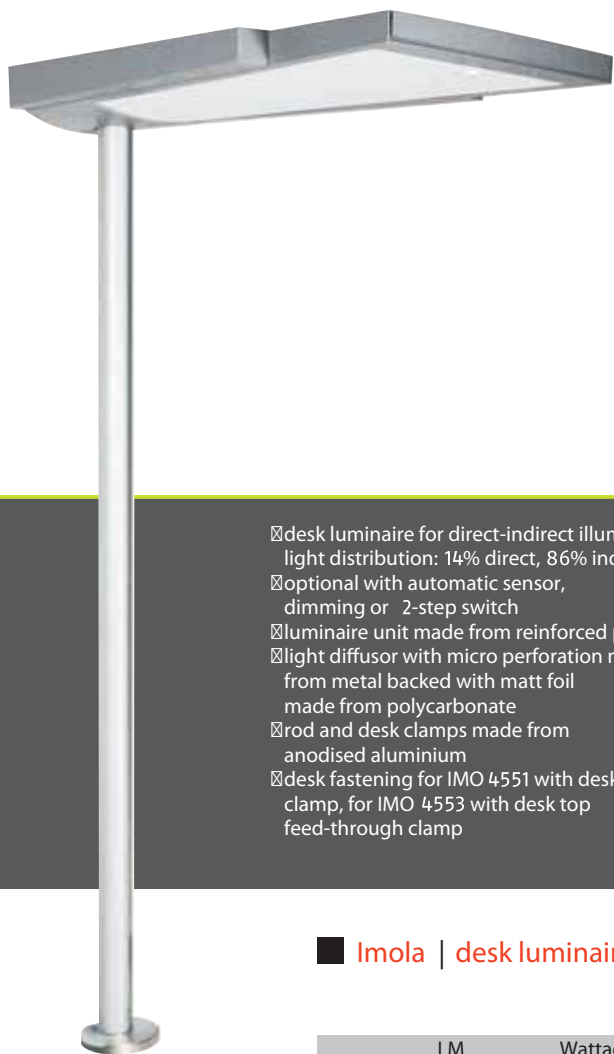

- ☑ desk luminaire for direct-indirect illumination, light distribution: 14% direct, 86% indirect
- ☑ optional with automatic sensor, dimming or 2-step switch
- ☑ luminaire unit made from reinforced polymide
- ☑ light diffuser with micro perforation made from metal backed with matt foil made from polycarbonate
- ☑ rod and desk clamps made from anodised aluminium
- ☑ desk fastening for IMO 4551 with desk-edge clamp, for IMO 4553 with desk top feed-through clamp
- ☑ dimming version: continuous dimming from 10 – 100 %
- ☑ sensor version: daylight control with automatic cut-off function and active control with motion detector
- ☑ ECG integral
- ☑ ready to plug-in to mains, connection cable (length: 196.9")
- ☑ color combinations:
light head: carbongrey, astrosilver, white, grey metallic (effect)
stand rod: silver, white, chrome gloss

Imola | desk luminaire



LM	Wattage	⚡	Order No.	LVK	lb
----	---------	---	-----------	-----	----


with desk-edge clamp (thickness of desk top max. 2.8"):

	TC-L /2G 11 4 x55 W	ECG 2-step switch	IMO 4551	552	11.9
		ECG dimming	IMO 4551 DIM	552	11.7
		ECG automatic sensor	IMO 4551 SENSO	552	13.2

with desk top feed-through clamp (thickness of desk top max. 1.8"):

	TC-L /2G 11 4 x55 W	ECG 2-step switch	IMO 4553	552	11.9
		ECG dimming	IMO 4553 DIM	552	11.7
		ECG automatic sensor	IMO 4553 SENSO	552	13.2

Accessories		Illumination
Cover plain:		IMO455 AG direct
Clear cover:		IMO455 AK indirect
Cover perforated:		IMO455 AP less indirect light share

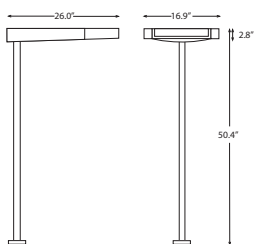

Fastening for IMO4551 with desk-edge clamp



Fastening for IMO4553 with desk top feed-through clamp




- ☑ wall luminaire for direct-indirect illumination, light distribution: 14% direct, 86% indirect
- ☑ optional with automatic sensor, dimming or 2-step switch
- ☑ luminaire unit made from reinforced polymide
- ☑ light diffuser with micro perforation made from metal backed with matt foil made from polycarbonate
- ☑ anodised rod and wall bracket made from aluminium
- ☑ dimming version: continuous dimming from 10 – 100 %

- ☑ sensor version: daylight control with automatic cut-off function and active control with motion detector
- ☑ ECG integral
- ☑ ready to plug-in to mains, connection cable (length: 196.9")
- ☑ color: carbongrey, astrosilver, white, RAL

Imola | wall luminaire



LM	Wattage		Order No.	LVK	lb	
	TC-L / 2G 11	4 x 55 W	ECG 2-step switch	IMO 45520	552	11.0
			ECG dimming	IMO 45520 DIM	552	11.2
			ECG automatic sensor	IMO 45520 SENSO	552	12.5


Accessories		Order No.	Illumination
Cover plain:		IMO455 AG	direct
Clear cover:		IMO455 AK	indirect
Cover perforated:		IMO455 AP	less indirect light share



Imola XL


- ☒ free-standing luminaire for direct-indirect illumination, light distribution: 36% direct, 64% indirect
- ☒ optional with automatic sensor, dimming or 2-step switch
- ☒ luminaire unit made from reinforced polymide
- ☒ light diffuser printed with micro points made from white satinated acrylic
- ☒ stand rod brought out of center made from anodised aluminium
- ☒ base made from metal with fine structure
- ☒ dimming version: continuous dimming from 10 – 100 %

- ☒ sensor version: daylight control with automatic cut-off function and active control with motion detector
- ☒ ECG integral
- ☒ ready to plug-in to mains, connection cable (length: 196.9")
- ☒ color: carbongrey, astrosilver, RAL




Imola XL | free-standing luminaire



LM	Wattage	⚡	Order No.	LVK	lb
 TC-L /2G 11	4 x55 W	ECG 2-step switch	IMO 20.4550	553	22.0
		ECG dimming	IMO 20.4550 DIM	553	22.0
		ECG automatic sensor	IMO 20.4550 SENSO	553	22.0



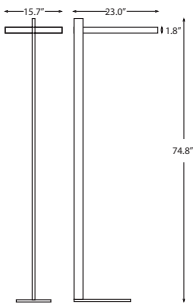


- ☒ free-standing luminaire for direct-indirect illumination, light distribution: 20% direct, 80% indirect
- ☒ optional with automatic sensor, dimming or 2-step switch
- ☒ luminaire unit made from metal
- ☒ pure white light diffuser, perforated, made from metal backed with matt foil
- ☒ stand rod brought out of center, made from aluminium
- ☒ anthracite-black base made from metal
- ☒ dimming version: pushbutton for switching and dimming

- ☒ sensor version: daylight control with automatic cut-off function and active control with motion detector
- ☒ ECG integral
- ☒ ready to plug-in to mains, connection cable (length: 118.1")
- ☒ color: iron glimmer light-grey, RAL

Monza Duo | free-standing luminaire




LM	Wattage	⚡	Order No.	LVK	lb
 TC-L/2G11	4 x 55 W	ECG 2-step switch	MON/D4550	565	38.3
		ECG dimming	MON/D4550 DIM	565	38.3
		ECG automatic sensor	MON/D4550 SENSO	565	38.3

Monza Duo

Monza

- ☒ free-standing luminaire for direct-indirect illumination, light distribution: 15% direct, 85% indirect
- ☒ optional with automatic sensor, dimming or 2-step switch
- ☒ asymmetrical luminaire unit made from metal
- ☒ pure white light diffuser, perforated, made from high-grade metal backed with matt foil
- ☒ stand rod brought out of center with shaft made from high-grade aluminium
- ☒ anthracite-black base made from metal
- ☒ dimming version: pushbutton for switching and dimming

- ☒ sensor version: daylight control with automatic cut-off function and active control with motion detector
- ☒ ECG integral
- ☒ ready to plug-in to mains, connection cable (length: 118.1")
- ☒ color: iron glimmer light-grey, RAL
- ☒ Also available as wall or pendant luminaire! See page 644 or page 579

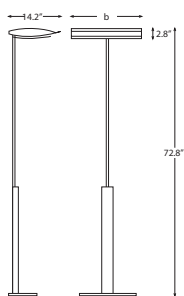

Monza | free-standing luminaire



LM	Wattage	⚡	Order No.	LVK	lb	Width b
☒	4 x 36 W	ECG 2-step switch	MON 4360	565	37.4	19.5"
		ECG 2-step switch	MON 4550	565	37.8	24.2"
		ECG dimming	MON 4550 DIM	565	38.3	24.2"
		ECG automatic sensor	MON 4550 SENSO	565	38.7	24.2"


- Accessories
- Clear cover made from polycarbonate MON 4360: [MON 4360 AK](#)
 - Opal cover made from polycarbonate MON 4360: [MON 4360 AO](#)
 - Clear cover made from polycarbonate MON 4550: [MON 4550 AK](#)
 - Opal cover made from polycarbonate MON 4550: [MON 4550 AO](#)



as wall luminaire



as pendant luminaire

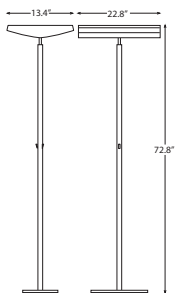


- ☒ free-standing luminaire for direct-indirect illumination, light distribution: 20% direct, 80% indirect
- ☒ optional with automatic sensor, dimming or 2-step switch
- ☒ luminaire unit made from metal, length sides iron glimmer light-grey
- ☒ matt white light diffuser, perforated, made from high-grade metal backed with matt foil
- ☒ stand rod made from high-grade aluminium, iron glimmer light-grey
- ☒ grey-metallic base made from metal

- ☒ sensor version: daylight control with automatic cut-off function and active control with motion detector
- ☒ ECG integral
- ☒ ready to plug-in to mains, connection cable (length: 118.1")
- ☒ colour: iron glimmer light-grey, RAL

Monza Eco | free-standing luminaire



LM	Wattage	⚡	Bestell.Nr.	LVK	lb
 TC-L /2G11	2 x55 W	ECG 2-step switch	MON 4255 ECO	565	28.8
	4 x55 W	ECG 2-step switch	MON 4550 ECO	565	29.3
		ECG automatic sensor	MON 4550 ECO/SENSO	565	29.3

Monza Eco


Twin



- ☑ free-standing luminaire with 2 separate luminaire units for direct, indirect or direct-indirect illumination
 - ☑ luminaire unit pivots individually through 315°, can be separately switched on/off or dimmed
 - ☑ luminaire unit made from high-grade aluminium and polycarbonate
 - ☑ light diffuser made from clear acrylic with faceted structure on the inside
 - ☑ stand rod made from high-grade aluminium
 - ☑ matt-black luminaire base made from high-grade die-cast with metal plate in luminaire colour
 - ☑ ECG integral
 - ☑ ready to plug-in to mains, connection cable (length: 98.4")
 - ☑ colour: polarmetallic
 - ☑ Also available as wall luminaire!
- See page **645**


■ Twin | free-standing luminaire



LM	Wattage	⚡	Order No.	LVK	lb	
	TC-F /2G10	4 x36 W	ECG	TWIN 1.436	2 x535	26.4
			ECG dimming	TWIN 1.436 DIM	2 x535	31.9



Accessories Specular louvre: [ZBW 70](#)

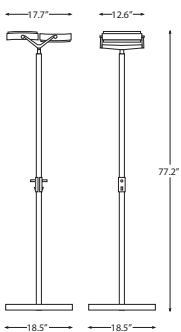

as wall luminaire



Match 500




- ☑ free-standing luminaire with 2 separate light heads for direct or direct-indirect illumination
- ☑ light heads move in all directions via gimbals
- ☑ specular reflectors made from highest-grade aluminium
- ☑ gimbals made from die-cast aluminium, socket holders made from heat-resistant polycarbonate
- ☑ stand rod made from high-grade aluminium
- ☑ matt-black luminaire base made from high-grade die-cast with metal plate in luminaire color

- ☑ ECG integral
- ☑ ready to plug-in to mains, connection cable (length: 98.4")
- ☑ color: iron glimmer light-grey, RAL

Match 500 | free-standing luminaire




LM	Wattage	▲	Order No.	LVK	⚡	lb
HIT-CE / G12	2 x 35 W	25°	MA 532.350	2 x 195	ECG	33.4
	2 x 70 W	25°	MA 532.700	2 x 195	ECG	33.4
QT32/m / E27 dimnable	2 x 100 W	25°	MA 532.100	2 x 195		32.6

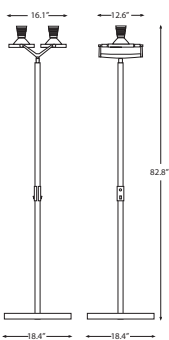


Arena



- ☑ light heads move in all directions via gimbals
- ☑ luminaire unit tilts through 30°
- ☑ luminaire unit and stand rod made from high-grade aluminium, lacquered base made from metal
- ☑ HIT-CE versions with UV filters
- ☑ ECG and electronic transformers integral
- ☑ ready to plug-in to mains, connection cable (length: 196.9")
- ☑ color: silver, RAL
- ☑ Further variations on demand.

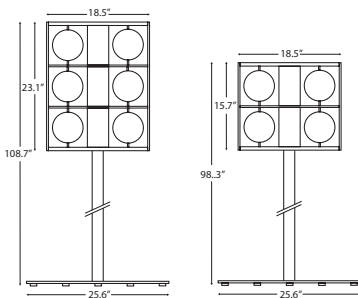

■ Arena | free-standing luminaire



	LM	Wattage	Order No.	⚡
4-lamp	HIT-CE / G12 UV filter	4 x 35 W	SC 704.35	ECG
		4 x 70 W	SC 704.70	ECG
6-lamp	HIT-CE / G12 UV filter	6 x 35 W	SC 706.35	ECG
		6 x 70 W	SC 706.70	ECG
	QR111 / G53	6 Xmax. 100 W	SC 706.10	Transformers



Accessories

Honeycomb louvre: black [ZBW20](#) (not suitable for QR 111)







solavanti lighting



SOLAVANTI LIGHTING, LLC

Dallas, Texas

Tel.: 1.866.356.4458

Fax: 1.866.516.1924

www.solavantilighting.com