



**solavanti** lighting




**PERFORMANCE**<sup>10</sup>

**LTS**<sup>®</sup>  
LIGHT & LUMINAIRES



BEL

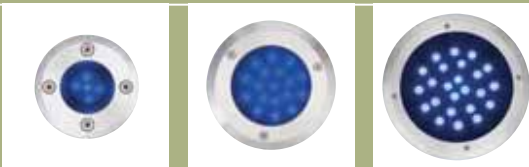

BEL10 672 BEL11 672 BEL12 672

BELED



BELED140 674 BELED220 674

BEL



BEL33 675 BEL34 675

AWA



AWA70 677 AWA150 677

LIM



LIM 677

RAG



RAG 677

AWA



AWA300 679 AWA015 679

Spike



Spike 680

BGL



BGL 681

# Outdoor



Messeplätze, Friedrichshafen






**BEL 10 | outdoor luminaires | LED | AD 70**

- ☑ suitable for recess into soil
- ☑ front ring made from stainless steel, light diffuser made from frosted pressed glass
- ☑ housing made from high-grade die-cast
- ☑ plastic recess box included (not for cavity wall installation)
- ☑ max. load capacity: 6600 lbs at 12.4 m/h
- ☑ surface temperature of glass: 104° F
- ☑ power supply unit integral, luminaire ready for connection

Pressed glass	120V 60 Hz	IP67	CE
---------------	---------------	------	----




LED	Wattage	white	blue	red	AD	ET	lb
☑ 5 x LED	1 W	<a href="#">BEL 10.100</a>	<a href="#">BEL 10.101</a>	<a href="#">BEL 10.102</a>	2.8"	3.5"	8.8

**BEL 11 | outdoor luminaires | LED | AD 130**

- ☑ suitable for recess into soil
- ☑ front ring made from stainless steel, light diffuser made from frosted pressed glass
- ☑ housing made from high-grade die-cast
- ☑ plastic recess box included (not for cavity wall installation)
- ☑ max. load capacity: 5500 lbs at 12.4 m/h
- ☑ surface temperature of glass: 104° F
- ☑ power supply unit integral, luminaire ready for connection

Pressed glass	120V 60 Hz	IP67	CE
---------------	---------------	------	----




LED	Wattage	white	blue	red	AD	ET	lb
☑ 18 x LED	2 W	<a href="#">BEL 11.100</a>	<a href="#">BEL 11.101</a>	<a href="#">BEL 11.102</a>	5.1"	5.1"	1.8

**BEL 12 | outdoor luminaires | LED | AD 180**

- ° suitable for recess into soil
- ° front ring made from stainless steel, light diffuser made from frosted pressed glass
- ° housing made from high-grade die-cast
- ° plastic recess box included (not for cavity wall installation)
- ° max. load capacity: 1100 lbs at 12.4 m/h
- ° max. surface temperature of glass: 104° F
- ° power supply unit integral, luminaire ready for connection

Pressed glass	120V 60 Hz	IP67	CE
---------------	---------------	------	----



LED	Wattage	white	blue	AD	ET	lb
☑ 25 x LED	3 W	<a href="#">BEL 12.100</a>	<a href="#">BEL 12.101</a> (on demand)	7.1"	3.2"	3.1






**BELED 140 | outdoor luminaire | LED | AD 140**

- ☑ suitable for recess into soil
- ☑ light head individually adjustable via ball joint
- ☑ high-power LED cool-white with highest-grade aluminium reflector
- ☑ PRI reflector technique for glare-free light and maximum luminous efficiency
- ☑ front ring made from stainless steel, clear toughened safety glass
- ☑ housing made from high-grade die-cast, plastic recess box included
- ☑ max. load capacity:
- ☑ power supply unit integral, luminaire ready for connection 909.1 lbs at 12.4 m/h
- ☑ RGB and other colors available on demand

 safety glass	110-240V 60 Hz
 IP67	 CE




LED	Wattage			Order No.	AD		ET	LVK
1 x LED cw	3 W	6° PRI	6500 K	<a href="#">BELED 140.01032</a>	5.5"		5.4"	5.9" 248

**BELED 220 | outdoor luminaire | LED | AD 219**

- ☑ suitable for recess into soil
- ☑ light head individually adjustable via ball joint
- ☑ high-power LED cool-white with highest-grade aluminium reflectors
- ☑ PRI reflector technique for glare-free light and maximum luminous efficiency
- ☑ front ring made from stainless steel, clear toughened safety glass
- ☑ housing made from high-grade die-cast, plastic recess box included
- ☑ max. load capacity: 909.1 lbs at 12.4 m/h
- ☑ power supply unit integral, luminaire ready for connection
- ☑ RGB and other colors available on demand

 safety glass	110-240V 60 Hz
 IP67	 CE




LED	Wattage			Order No.	AD		ET	LVK
4 x LED cw	4 x 3 W	6° PRI	6500 K	<a href="#">BELED 220.04032</a>	8.6"		8.5"	11.1" 248



symmetric

**BEL 33 | outdoor luminaires | symmetric | HIT-CE | AD 219**

- ☑ suitable for recess into soil
- ☑ reflector pivots through 10°, symmetrical or asymmetrical light distribution
- ☑ specular reflector made from highest-grade aluminium
- ☑ PRI reflector technique for glare-free light and maximum luminous efficiency
- ☑ front ring made from stainless steel, clear toughened safety glass
- ☑ housing made from high-grade die-cast, plastic recess box included
- ☑ max. load capacity: 909.1 lbs at 12.4 m/h
- ☑ power supply unit integral, compensated and with igniter
- ☑ luminaire ready for connection




LM	Wattage	▲	Order No.	AD	▼	ET	LVK	lb
☛ HIT-CE / G 12	35 W	15°	BEL 33.351	8.6"	8.5"	11.1"	195	10.1
		25° PRI	BEL 33.352	8.6"	8.5"	11.1"	195	10.1
		40° PRI	BEL 33.353	8.6"	8.5"	11.1"	195	10.1
		60° PRI	BEL 33.354	8.6"	8.5"	11.1"	195	10.1
☛ HIT-CE / G 12	70 W	15°	BEL 33.701	8.6"	8.5"	11.1"	195	10.1
		25° PRI	BEL 33.702	8.6"	8.5"	11.1"	195	10.1
		40° PRI	BEL 33.703	8.6"	8.5"	11.1"	195	10.1
		60° PRI	BEL 33.704	8.6"	8.5"	11.1"	195	10.1



asymmetric

**BEL 34 | outdoor luminaires | asymmetric | HIT-CE | AD 219**

- ☑ suitable for recess into soil
- ☑ specular reflector made from highest-grade aluminium, asymmetrical light distribution
- ☑ PRI reflector technique for glare-free light and maximum luminous efficiency
- ☑ front ring made from stainless steel, clear toughened safety glass
- ☑ housing made from high-grade die-cast, plastic recess box included
- ☑ max. load capacity: 909.1 lbs at 12.4 m/h
- ☑ power supply unit integral, compensated and with igniter
- ☑ luminaire ready for connection



LM	Wattage	▲	Order No.	AD	▼	ET	LVK	lb
☛ HIT-CE / G 12	35 W	60° PRI	BEL 34.354	8.6"	8.5"	11.1"	246	10.1
	70 W	60° PRI	BEL 34.704	8.6"	8.5"	11.1"	246	10.1




# Outdoor spotlights

Outdoor spotlights place buildings into the right light or illuminate squares at night. Solid housings ensure for long service life.



**AWA70 | outdoor spotlight | HIT-DE-CE | 70 W**

- ☒ reflector with wide beam angle
- ☒ housing made from high-grade die-cast, stove-enamelled
- ☒ ceiling fastening included
- ☒ power supply unit integral
- ☒ Not suitable for mounting on flammable material.
- ☒ color: black, white




LM	Wattage	Order No.	lb
	HIT-DE-CE / RX 7s 70 W	AWA 7003	7.5

- Accessories
- Safety guard: black [ZSG 40](#)
  - Shutter blades: black, white [ZBK 40](#)
  - Side blades: black, white [ZSB 40](#)



**AWA150 | outdoor spotlight | HIT-DE-CE | 150 W**

- ☒ reflector with wide beam angle
- ☒ housing made from high-grade die-cast, stove-enamelled
- ☒ ceiling fastening included
- ☒ power supply unit integral
- ☒ color: black, white




LM	Wattage	Order No.	lb
	HIT-DE-CE / RX7s-24 150 W	AWA 15003	12.4

- Accessories
- Safety guard: black, white [ZSG41](#)
  - Side blades: black, white [ZSB41](#)



**LIM | outdoor spotlights | HIT-DE-CE | 70/150 W**

- ☒ luminaire available with symmetrical or asymmetrical light distribution
- ☒ reflector with wide beam angle
- ☒ housing made from high-grade die-cast, stove-enamelled
- ☒ fastening of the glass via quick-clips
- ☒ power supply unit integral
- ☒ color: grey




LM	Wattage	symmetrical	asymmetrical	lb
	HIT-DE-CE / RX7s 70 W	LIM 1.700	LIM 1.701	14.1
	HIT-DE-CE / RX7s-24 150 W	LIM 1.1500	LIM 1.1501	15.6



**RAG | outdoor spotlights | 250/400 W**

- ☒ luminaire available with symmetrical or asymmetrical light distribution
- ☒ reflector with wide beam angle
- ☒ with swivel adjustment
- ☒ housing made from high-grade die-cast, stove-enamelled
- ☒ power supply unit integral
- ☒ Not suitable for mounting on flammable material.
- ☒ color: grey

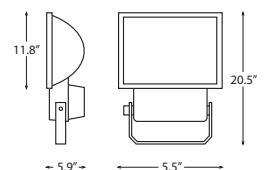

LM	Wattage	symmetrical	asymmetrical	lb
	HIE / E 40 or HSE / E 40 250 W	RAG 2.250	RAG 2.251	24.2
	HIT / E 40 or HST / E 40 400 W	RAG 2.400	RAG 2.401	29.4



Steigenberger Hotel de Saxe, Dresden; MM Fotowerbung Kaufungen




Thomas Gruppe, Geisenkirchen



**AWA 300 | outdoor spotlight | QT-DE11/12 | 300 W**

safety glass	120V 60 Hz	IP55	
--------------	---------------	------	--

- ☑ reflector with wide beam angle
- ☑ housing made from high-grade die-cast, stove-enamelled
- ☑ ceiling fastening included
- ☑ Not suitable for mounting on flammable material.
- ☑ color: black, white



LM	Wattage	Order No.	lb
QT-DE11/12 / R7s Contact gap: 4.5"	300 W	<b>AWA 30003</b>	6.4


- Accessories
- Safety guard: black **ZSG40**
  - Shutter blades: black, white **ZBK40**
  - Side blades: black, white **ZSB40**



**AWA 015 | outdoor spotlight | QT-DE11/12 | 150 W**


safety glass	120V 60 Hz	IP54	
--------------	---------------	------	--

- ° reflector with wide beam angle
- ° housing made from high-grade die-cast, stove-enamelled
- ° ceiling fastening included
- ° Not suitable for mounting on flammable material.
- ° color: black, white



LM	Wattage	Order No.	lb
QT-DE11/12 / R7s Contact gap: 4.5"	150 W	<b>AWA 0150</b>	1.5

- Accessories Safety guard: black **ZSG42**

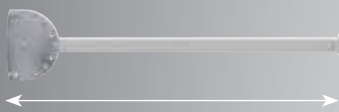

**ZWA | wall arm**

- ° galvanised metal rod, length: 1000 mm, can be cut to length
- ° 22.5 – 157.5° pivotable in adjusting mechanism
- ° load capacity: max. 18 kg
- ° easy wall mounting



Order No.	kg
<b>ZWA 12</b>	2.6

NEW



# Spike


Spike is a new decorative outdoor spotlight using LED technology for lighting external walkways or planting areas. Simply push-in, connect, and enjoy the beauty of nature lit up in the evening.


outdoor luminaire with ground spike or wall & floor bracket for screw mounting  
 2 x High-Power LED  
 luminaire head pivots through 90°  
 housing made from magnesium die-cast  
 spike and wall & floor bracket made from stainless steel  
 weatherproof and heat-resistant clear acrylic

converter integral  
 ready to plug-in (IP67, Wieland Gesis IP+), suitable for through-wiring  
 other LED colours available on demand  
 color: carbongrey, black



**SPK | outdoor luminaire | LED**

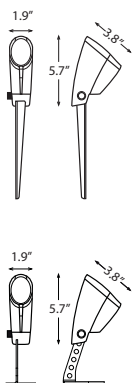120V 60 Hz	IP65	 CE
---------------	------	---





LM	Wattage		Order No.
----	---------	---	-----------

with ground spike

	2 x LED NW	2 x3 W	4000 K	<a href="#">SPK 10.231</a>
	2 x LED CW	2 x3 W	6500 K	<a href="#">SPK 10.232</a>

with wall & floor bracket

	2 x LED NW	2 x3 W	4000 K	<a href="#">SPK 11.231</a>
	2 x LED CW	2 x3 W	6500 K	<a href="#">SPK 11.232</a>

Accessories electric distribution block, 1 input, 3 outputs

- 1 socket cap for not used terminal exit
- connection cable with grounded plug and female connector, length 315.0"
- male-to-female cable, length 78.7"
- male-to-female cable, length 118.1"
- male-to-female cable, length 196.9"


- [AL710](#)
- [AL711](#)
- [AL700/8](#)
- [AL705/2](#)
- [AL705/3](#)
- [AL705/5](#)

NEW

# BGL




- ☒ housing made from high-grade aluminium
- ☒ easy relamping via screwable front rings
- ☒ toughened safety glass
- ☒ ECG integral, 3-pole terminal block
- ☒ color: silver, white




## ■ BGL10 | wall luminaire | outdoor | direct-indirect

☒ outdoor wall luminaire for direct-indirect illumination



LM	Wattage	Order No.	⚡
☒ 2 x HIPAR 51 / GX10	20 W	BGL 10.2020	ECG

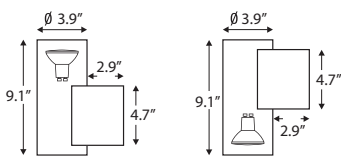

## ■ BGL20 | wall luminaire | outdoor

☒ installation for direct or indirect illumination



LM	Wattage	Order No.	⚡
☒ HIPAR 51 / GX10	20 W	BGL 20.20	ECG



# solavanti lighting



SOLAVANTI LIGHTING, LLC

Dallas, Texas

Tel.: 1.866.356.4458

Fax: 1.866.516.1924

[www.solavantilighting.com](http://www.solavantilighting.com)