



**solavanti** lighting



**PERFORMANCE**<sup>10</sup>

**LTS**<sup>®</sup>  
LIGHT & LUMINAIRES



# Square Downlights

## QP



QP Highly polished  
266



QP Matt finish 267



QP Highly polished  
louvre 268



QP Louvre  
matt finish 269



HIT  
QP Batwing 270


## QPVF



HIT

QPVF 271

## QP Decorative Attachments




QP Decorative  
Attachments 272

## Accessories




Accessories 273

## Scenè 2



Scenè 2  
Recessed 274



Scenè 2  
Semi-recessed 278

## Piazza



Stainless steel

Piazza 300 282



Stainless steel

Piazza 200 285



Stainless steel

Piazza 200 286



# QP

These square recessed luminaires with or without decorative attachments are first class architectural recessed luminaires. The QP series sets a standard by its versatility and the supreme quality. The recessed flanges are made from die-cast, the reflectors from highest grade aluminium.








- ☑ no-tool ceiling recess of the luminaire via adjustable clamping springs
- ☑ ceiling recessed frame made from high-grade die-cast
- ☑ reflector with highly polished effect made from highest-grade aluminium

- ☑ ECG as separate unit, 5-pole connection box
- ☑ recessed luminaire also available with emergency lighting
- ☑ decorative attachments and concrete casting surround available as accessories
- ☑ color: silver, white

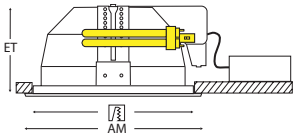

■ **QP 30 / 40** | square recessed luminaires | highly polished | TC-DEL

ECG	120V 60 Hz	IP20	CE
Dimming	DALI	Emergency Lighting	

Wattage	LM	AM	DS	ET	Order No.	LVK	
2 x10/13 W	TC-DEL / G24q-1	7.7" ECG	0.04"-1.4"	7.2"-7.2"	4.1"	QP 30.213	376
		7.7" ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 30.213 DIM/1-10	376
		7.7" ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 30.213 DIM/DIG	376
		7.7" ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 30.213 DIM/DALI	376
2 x10/13 W	TC-DEL / G24q-1	8.7" ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.213	378
		8.7" ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.213 DIM/1-10	378
		8.7" ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.213 DIM/DIG	378
		8.7" ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.213 DIM/DALI	378
2 x18 W	TC-DEL / G24q-2	7.7" ECG	0.04"-1.4"	7.2"-7.2"	4.1"	QP 30.218	376
		7.7" ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 30.218 DIM/1-10	376
		7.7" ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 30.218 DIM/DIG	376
		7.7" ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 30.218 DIM/DALI	376
2 x18 W	TC-DEL / G24q-2	8.7" ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.218	378
		8.7" ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.218 DIM/1-10	378
		8.7" ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.218 DIM/DIG	378
		8.7" ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.218 DIM/DALI	378
2 x26 W	TC-DEL / G24q-3	8.7" ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.226	378
		8.7" ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.226 DIM/1-10	378
		8.7" ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.226 DIM/DIG	378
		8.7" ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 40.226 DIM/DALI	378

Flanges & Decorative Attachments p.272

.03 .38 .39



Accessories  
Concrete casting surround:


QP 30  
BT QP3.115

QP 40  
BT QP 4.150



- ☒ no-tool ceiling recess of the luminaire via adjustable clamping springs
- ☒ ceiling recessed frame made from high-grade die-cast
- ☒ reflector with matt structure made from highest-grade aluminium

- ☒ ECG as separate unit, 5-pole connection box
- ☒ recessed luminaire also available with emergency lighting
- ☒ decorative attachments and concrete casting surround available as accessories
- ☒ color: silver, white

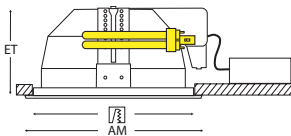

■ QP32 / 42 | square recessed luminaires | matt | TC-DEL

ECG	120V 60 Hz	IP20	CE
Dimming	DALI	Emergency Lighting	

Wattage	LM	AM		DS		ET	Order No.	LVK
2 x10/13W	TC-DEL / G 24q-1	7.7"	ECG	0.04"-1.4"	7.2"-7.2"	4.1"	QP 32. 213	377
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 32. 213 DIM/1- 10	377
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 32. 213 DIM/DIG	377
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 32. 213 DIM/DALI	377
2 x10/13 W	TC-DEL / G 24q-1	8.7"	ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 213	379
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 213 DIM/1- 10	379
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 213 DIM/DIG	379
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 213 DIM/DALI	379
2 x18 W	TC-DEL / G 24q-2	7.7"	ECG	0.04"-1.4"	7.2"-7.2"	4.1"	QP 32. 218	377
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 32. 218 DIM/1- 10	377
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 32. 218 DIM/DIG	377
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 32. 218 DIM/DALI	377
2 x18 W	TC-DEL / G 24q-2	8.7"	ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 218	379
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 218 DIM/1- 10	379
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 218 DIM/DIG	379
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 218 DIM/DALI	379
2 x26 W	TC-DEL / G 24q-3	8.7"	ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 226	379
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 226 DIM/1- 10	379
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 226 DIM/DIG	379
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 42. 226 DIM/DALI	379

Flanges & Decorative Attachments p.272 .03 .38 .39




Accessories QP 32 QP 42  
Concrete casting surround: BT QP3.115 BT QP4.150



- ☒ no-tool ceiling recess of the luminaire via adjustable clamping springs
- ☒ ceiling recessed frame made from high-grade die-cast
- ☒ reflector and 4-cell louvre with highly polished effect made from highest-grade aluminium
- ☒ ECG as separate unit, 5-pole connection box

- ☒ recessed luminaire also available with emergency lighting
- ☒ concrete casting surround available as accessories
- ☒ color: silver, white

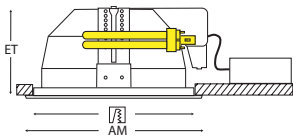

■ **QP 34/44** | square recessed luminaires | louvre highly polished | TC-DEL

120V 60 Hz	IP20	CE
ECG	Dimming	DALI
		Emergency Lighting

Wattage	LM	AM	⚡	DS	⚡	ET	Order No.	LVK
2 x10/13 W	TC-DEL / G24q-1	7.7"	ECG	0.04"-1.4"	7.2"-7.2"	4.1"	QP 34. 213	428
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 34. 213 DIM/1- 10	428
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 34. 213 DIM/DIG	428
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 34. 213 DIM/DALI	428
2 x10/13 W	TC-DEL / G24q-1	8.7"	ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 213	431
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 213 DIM/1- 10	431
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 213 DIM/DIG	431
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 213 DIM/DALI	431
2 x18 W	TC-DEL / G24q-2	7.7"	ECG	0.04"-1.4"	7.2"-7.2"	4.1"	QP 34. 218	428
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 34. 218 DIM/1- 10	428
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 34. 218 DIM/DIG	428
		7.7"	ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 34. 218 DIM/DALI	428
2 x18 W	TC-DEL / G24q-2	8.7"	ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 218	431
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 218 DIM/1- 10	431
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 218 DIM/DIG	431
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 218 DIM/DALI	431
2 x26 W	TC-DEL / G24q-3	8.7"	ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 226	431
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 226 DIM/1- 10	431
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 226 DIM/DIG	431
		8.7"	ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 44. 226 DIM/DALI	431



Accessories  
Concrete casting surround:


QP 34  
BT QP3.115

QP 44  
BT QP 4.150



- ☒ no-tool ceiling recess of the luminaire via adjustable clamping springs
- ☒ ceiling recessed frame made from high-grade die-cast
- ☒ reflector and 4-cell louvre with matt structure made from highest-grade aluminium
- ☒ ECG as separate unit, 5-pole connection box

- ☒ recessed luminaire also available with emergency lighting
- ☒ concrete casting surround available as accessories
- ☒ color: silver, white

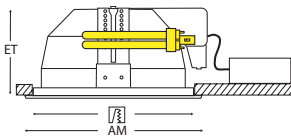

**QP35/45 | square recessed luminaires | louvre matt | TC-DEL**

120V 60 Hz IP20 CE


ECG Dimming DALI Emergency Lighting

Wattage	LM	AM	⚡	DS	⚡	ET	Order No.	LVK
2 x10/13 W	TC-DEL / G24q-1	7.7"	ECG	0.04"-1.4"	7.2"-7.2"	4.1"	QP 35.213	429
			ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 35.213 DIM/1-10	429
			ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 35.213 DIM/DIG	429
			ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 35.213 DIM/DALI	429
2 x10/13 W	TC-DEL / G24q-1	8.7"	ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.213	432
			ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.213 DIM/1-10	432
			ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.213 DIM/DIG	432
			ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.213 DIM/DALI	432
2 x18 W	TC-DEL / G24q-2	7.7"	ECG	0.04"-1.4"	7.2"-7.2"	4.1"	QP 35.218	429
			ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 35.218 DIM/1-10	429
			ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 35.218 DIM/DIG	429
			ECG dim.	0.04"-1.4"	7.2"-7.2"	4.1"	QP 35.218 DIM/DALI	429
2 x18 W	TC-DEL / G24q-2	8.7"	ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.218	432
			ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.218 DIM/1-10	432
			ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.218 DIM/DIG	432
			ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.218 DIM/DALI	432
2 x26 W	TC-DEL / G24q-3	8.7"	ECG	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.226	432
			ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.226 DIM/1-10	432
			ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.226 DIM/DIG	432
			ECG dim.	0.04"-1.6"	8.2"-8.2"	5.7"	QP 45.226 DIM/DALI	432




Accessories  
Concrete casting surround:

QP 35 BT QP3.115 QP 45 BT QP.4 150

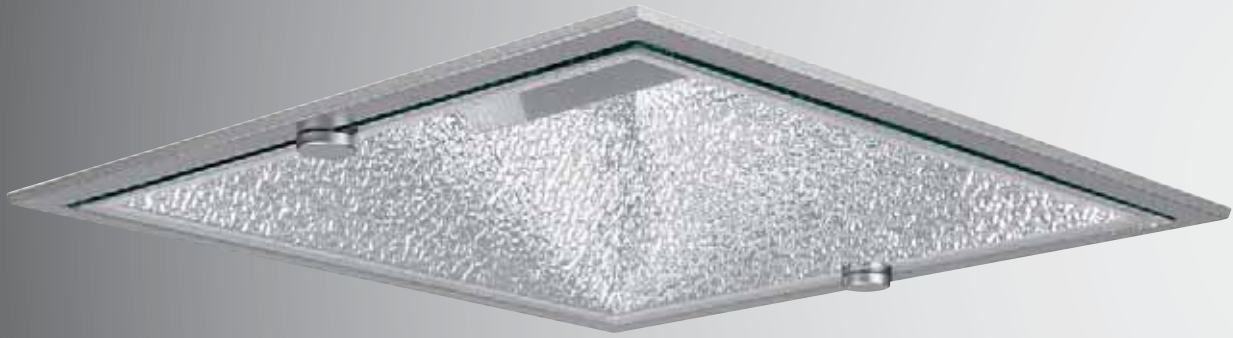

- ☑ no-tool mounting of the ceiling recessed frame via adjustable clamping springs
- ☑ removable toughened safety glass
- ☑ ceiling recessed frame made from high-grade die-cast
- ☑ reflector with highly polished structure made from highest-grade aluminium

- ☑ ready to plug-in to ECG
- ☑ ECG to be ordered separately
- ☑ color: silver, white



**QP40** | square recessed luminaire | Batwing | HIT-CE



- ☑ with batwing reflector technique for special requirements of goods illumination
- ☑ wide beam angle



Wattage	LM	AM	DS	ET	Order No.	LVK
70/150 W	HIT-CE / G12	222	0.04"-1.6"	8.2"-8.2"	5.1"	QP 40.150 347

Power supply unit:

- ⚡ ECG 70 W CVGKE710
- 150 W CVGKE1510
- CCG 70 W CVG 700
- 150 W CVG 1500



**QPA40** | square recessed luminaire | asymmetrical | HIT-CE


- ☑ asymmetrical light distribution



Wattage	LM	AM	DS	ET	Order No.	LVK
70/150 W	HIT-CE / G12	222	0.04"-1.6"	8.2"-8.2"	5.1"	QPA 40.150 348

Power supply unit:


- ⚡ ECG 70 W CVGKE710
- 150 W CVGKE1510
- CCG 70 W CVG 700
- 150 W CVG 1500





- ☒ luminaire pivots out 40°, with continuous position detent
- ☒ no-tool mounting of ceiling recessed frame via adjustable clamping springs, luminaire unit with suspension detent
- ☒ removable safety glass
- ☒ luminaire unit made from high-grade aluminium, recessed frame made from die-cast
- ☒ safety glass partly frosted


- ☒ reflector with matt structure made from highest-grade aluminium, asymmetrical light distribution
- ☒ lamp position horizontal
- ☒ ready to plug-in to ECG
- ☒ ECG to be ordered separately
- ☒ color: silver, white



■ QPVF | wallwasher | HIT-CE




Wattage	LM	AM	DS	ET	Order No.	LVK
35/70 W	HIT-CE / G12	196	0.04"-1.2"	7.2" x 7.2"	110	QPVF 30.700 349
Power supply unit:				ECG	35 W	CVGKE360
					70 W	CVGKE710
				CCG	35 W	CVG 350
					70 W	CVG 700

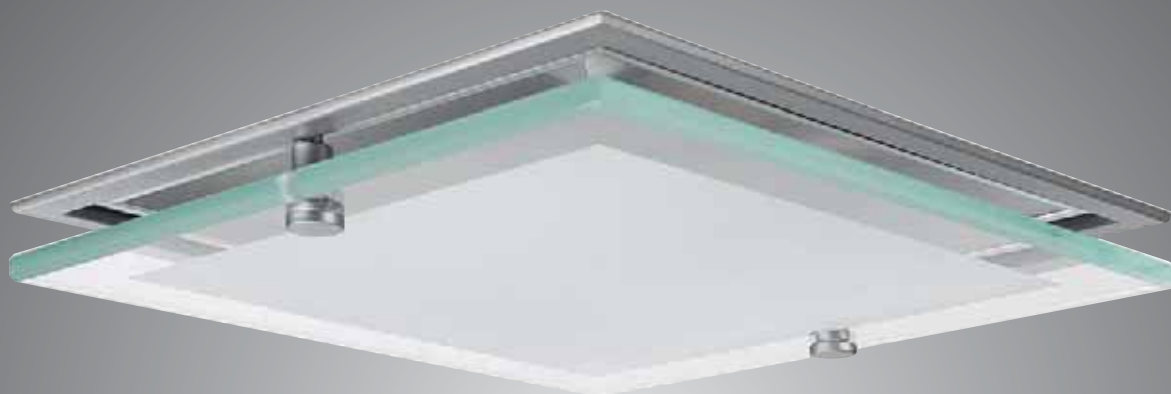

- ☒ no-tool fastening at the recessed frame via decorative screws
- ☒ toughened safety glass

■ QPZ | decorative attachments

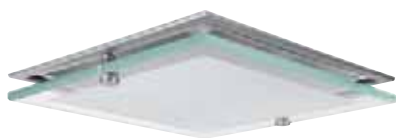

.03 Glass partly frosted, attached

for AD	<b>7.7"</b>	<b>8.7"</b>
	<a href="#">QPZ30.03</a>	<a href="#">QPZ40.03</a>



.38 Glass matt finish, recessed

for AD	<b>7.7"</b>	<b>8.7"</b>
	<a href="#">QPZ30.38</a>	<a href="#">QPZ40.38</a>



.39 Glass pane clear, recessed

for AD	<b>7.7"</b>	<b>8.7"</b>
	<a href="#">QPZ30.39</a>	<a href="#">QPZ40.39</a>


## Accessories Square Downlights

### BT | concrete casting surround



- ☒ concrete casting surround for fairfaced concrete
- ☒ housing made from hot-dip galvanised metal
- ☒ with fastening straps

for AM	DA	H	LxB	Order No.
in	in	in	in	in
7.7"	7.4" x 7.4"	4.5"	18.5" x 10.8"	BT QP 3.115
8.7"	8.4" x 8.4"	5.9"	19.7" x 11.8"	BT QP 4.150






**SCE 201 | recessed downlights | without decor**

ECG 120V 60 Hz IP20 CE

- ☑ no-tool mounting of the ceiling recessed frame via adjustable clamping springs
- ☑ easy relamping via pivoting socket (not for HIT-CE version)
- ☑ minimal light spill in the ceiling cavity (not for HIT-CE version)
- ☑ ceiling recessed frame made from metal
- ☑ reflector with highly polished structure made from highest-grade aluminium, recessed by 0.8"
- ☑ lamp position horizontal
- ☑ TC-DEL: ECG as separate unit, 5-pole connection box
- ☑ HIT-CE: ready to plug-in, ECG to be ordered separately
- ☑ color: silver, RAL



LM	Wattage	▲	Order No.	DS	▼	ET	LVK	lb	⚡
☛ TC-DEL / G24q-1 TC-DEL / G24q-2 TC-DEL / G24q-3	2 x 10/13 W		<a href="#">SCE 201.50 E</a>	0.04"-1.2"	7.4"-7.4"	4.7"	237	4.0"	ECG
	2 x 18 W		<a href="#">SCE 201.60 E</a>	0.04"-1.2"	7.4"-7.4"	4.7"	237	4.0"	ECG
	2 x 26 W		<a href="#">SCE 201.80 E</a>	0.04"-1.2"	8.7"-8.7"	4.9"	277	4.6"	ECG
☛ HIT-CE / G 12 UV filter	1 x 35/70 W	40°	<a href="#">SCE 201.70</a>	0.04"-1.2"	7.4"-7.4"	5.5"	237	3.1"	

Power supply unit:

- ☛ ECG 35 W [CVGKE360](#)
- 70 W [CVGKE710](#)
- CCG 35 W [CVG 350](#)
- 70 W [CVG 700](#)

**SCE 201 | recessed downlights | with acrylic frame**

ECG 120V 60 Hz IP20 CE

- ☑ same as above
- ☑ clear acrylic frame with no-tool fastening

LM	Wattage	▲	Order No.	DS	▼	ET	LVK	lb	⚡
☛ TC-DEL / G24q-1 TC-DEL / G24q-2 TC-DEL / G24q-3	2 x 10/13 W		<a href="#">SCE 201.50 GE</a>	0.04"-1.2"	7.4"-7.4"	4.7"	237	4.0"	ECG
	2 x 18 W		<a href="#">SCE 201.60 GE</a>	0.04"-1.2"	7.4"-7.4"	4.7"	237	4.0"	ECG
	2 x 26 W		<a href="#">SCE 201.80 GE</a>	0.04"-1.2"	8.7"-8.7"	4.9"	277	4.6"	ECG
☛ HIT-CE / G 12 UV filter	1 x 35/70 W	40°	<a href="#">SCE 201.70 G</a>	0.04"-1.2"	7.4"-7.4"	5.5"	237	3.5"	

Power supply unit:


- ☛ ECG 35 W [CVGKE360](#)
- 70 W [CVGKE710](#)
- CCG 35 W [CVG350](#)
- 70 W [CVG700](#)



**SCE 201 | recessed downlights | with partly frosted glass**

ECG 120V 60 Hz IP20 CE

- ☒ no-tool mounting of the ceiling recessed frame via adjustable clamping springs
- ☒ easy relamping via pivoting socket (not for HIT-CE version)
- ☒ minimal light spill in the ceiling cavity (not for HIT-CE version)
- ☒ decorative glass partly frosted, no-tool fastening
- ☒ ceiling recessed frame made from metal
- ☒ reflector with highly polished structure made from highest-grade aluminium, recessed by 0.8"
- ☒ lamp position horizontal
- ☒ TC-DEL: ECG as separate unit, 5-pole connection box
- ☒ HIT-DEL: ready to plug-in, ECG to be ordered separately
- ☒ color: silver, RAL



LM	Wattage	Order No.	DS	ET	LVK	lb	ECG
	TC-DEL / G 24q-1	2 x 10/13 W	SCE 201.50 GE10	0.03"-1.4"	7.4"x7.4"	4.7"	237 6.2 ECG
	TC-DEL / G 24q-2	2 x 18 W	SCE 201.60 GE10	0.03"-1.4"	7.4"x7.4"	4.7"	237 6.2 ECG
	TC-DEL / G 24q-3	2 x 26 W	SCE 201.80 GE10	0.03"-1.4"	8.7"x8.7"	4.9"	277 7.7 ECG
	HIT-CE / G12	1 x 35/70 W	40° SCE 201.70 G10	0.03"-1.4"	7.4"x7.4"	5.5"	237 5.5
	UV filter Power supply unit:		ECG 35 W CVGKE360 70 W CVGKE710 CCG 35 W CVG350 70 W CVG700				

**SCE 201 | recessed downlights | with frosted glass**

ECG 120V 60 Hz IP20 CE

- ☒ same as above
- ☒ decorative glass frosted, no-tool fastening

LM	Wattage	Order No.	DS	ET	LVK	lb	ECG
	TC-DEL / G24q-1	2 x 10/13 W	SCE 201.50 GE11	0.03"-1.4"	7.4"x7.4"	4.7"	237 6.2 ECG
	TC-DEL / G24q-2	2 x 18 W	SCE 201.60 GE11	0.03"-1.4"	7.4"x7.4"	4.7"	237 6.2 ECG
	TC-DEL / G24q-3	2 x 26 W	SCE 201.80 GE11	0.03"-1.4"	8.7"x8.7"	4.9"	277 7.7 ECG
	HIT-CE / G12	1 x 35/70 W	40° SCE 201.70 G11	0.03"-1.4"	7.4"x7.4"	5.5"	237 5.5
	UV filter Power supply unit:		ECG 35 W CVGKE360 70 W CVGKE710 CCG 35 W CVG 350 70 W CVG 700				

**SCE201 | recessed downlights | with clear glass**

ECG 120V 60 Hz IP20 CE

- ☒ same as above
- ☒ decorative glass clear, no-tool fastening

LM	Wattage	Order No.	DS	ET	LVK	lb	ECG
	TC-DEL / G 24q-1	2 x 10/13 W	SCE 201.50 GE12	0.03"-1.4"	7.4"x7.4"	4.7"	237 6.2 ECG
	TC-DEL / G 24q-2	2 x 18 W	SCE 201.60 GE12	0.03"-1.4"	7.4"x7.4"	4.7"	237 6.2 ECG
	TC-DEL / G 24q-3	2 x 26 W	SCE 201.80 GE12	0.03"-1.4"	8.7"x8.7"	4.9"	277 7.7 ECG
	HIT-CE / G 12	1 x 35/70 W	40° SCE 201.70 G12	0.03"-1.4"	7.4"x7.4"	5.5"	237 5.5
	UV filter Power supply unit:		ECG 35 W CVGKE 360 70 W CVGKE 710 CCG 35 W CVG350 70 W CVG700				








**SCEH 201 | semi-recessed downlights | without decor**

ECG 120V 60 Hz IP20 CE

- ☑ no-tool mounting of the ceiling recessed frame via adjustable clamping springs
- ☑ easy relamping via pivoting socket (not for HIT-CE version)
- ☑ minimal light spill in the ceiling cavity (not for HIT-CE version)
- ☑ ceiling recessed frame made from metal, height of frame: 0.8"
- ☑ reflector with highly polished structure made from highest-grade aluminium, recessed by 0.8"
- ☑ lamp position horizontal
- ☑ TC-DEL: ECG as separate unit, 5-pole connection box
- ☑ HIT-CE: ready to plug-in, ECG to be ordered separately
- ☑ color: silver, RAL



LM	Wattage	▲	Order No.	DS	ET	LVK	lb	⚡
☛ TC-DEL / G24q-1 TC-DEL / G24q-2 TC-DEL / G24q-3	2 x10/13 W		<a href="#">SCEH 201.50 E</a>	0.04"-1.2" 7.4"-7.4"	4.1"	237	4.0	ECG
	2 x18 W		<a href="#">SCEH 201.60 E</a>	0.04"-1.2" 7.4"-7.4"	4.1"	237	4.0	ECG
	2 x26 W		<a href="#">SCEH 201.80 E</a>	0.04"-1.2" 8.7"-8.7"	4.3"	277	4.6	ECG

☛ HIT-CE / G 12	1 x35/70 W	40°	<a href="#">SCEH 201.70</a>	0.04"-1.2" 7.4"-7.4"	4.7"	237	3.1	
-----------------	------------	-----	-----------------------------	----------------------	------	-----	-----	--

Power supply unit:   
 ECG 35 W [CVGKE 360](#)  
 70 W [CVGKE 710](#)  
 CCG 35 W [CVG350](#)  
 70 W [CVG700](#)

**SCEH 201 | semi-recessed downlights | with acrylic frame**


ECG 120V 60 Hz IP20 CE

- ☑ same as above
- ☑ clear acrylic frame with no-tool fastening

LM	Wattage	▲	Order No.	DS	ET	LVK	lb	⚡
☛ TC-DEL / G24q-1 TC-DEL / G24q-2 TC-DEL / G24q-3	2 x10/13 W		<a href="#">SCEH 201.50 GE</a>	0.04"-1.2" 7.4"-7.4"	4.1"	237	4.0	ECG
	2 x18 W		<a href="#">SCEH 201.60 GE</a>	0.04"-1.2" 7.4"-7.4"	4.1"	237	4.0	ECG
	2 x26 W		<a href="#">SCEH 201.80 GE</a>	0.04"-1.2" 8.7"-8.7"	4.3"	277	4.6	ECG

☛ HIT-CE / G 12	1 x35/70 W	40°	<a href="#">SCEH 201.70 G</a>	0.04"-1.2" 7.4"-7.4"	4.7"	237	3.1	
-----------------	------------	-----	-------------------------------	----------------------	------	-----	-----	--


Power supply unit:   
 ECG 35 W [CVGKE360](#)  
 70 W [CVGKE710](#)  
 CCG 35 W [CVG350](#)  
 70 W [CVG700](#)

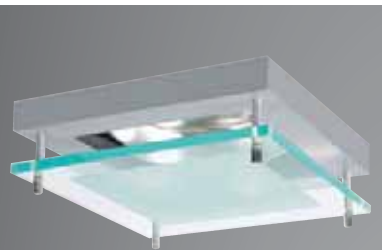


**SCEH201** | semi-recessed downlights | with partly frosted glass

- ☒ no-tool mounting of the ceiling recessed frame via adjustable clamping springs
- ☒ easy relamping via pivoting socket (not for HIT-CE version)
- ☒ minimal light spill in the ceiling cavity (not for HIT-CE version)
- ☒ decorative glass partly frosted, no-tool fastening
- ☒ ceiling recessed frame made from metal, height of frame: 0.8"
- ☒ reflector with highly polished structure made from highest-grade aluminium, recessed by 0.8"
- ☒ lamp position horizontal
- ☒ TC-DEL: ECG as separate unit, 5-pole connection box
- ☒ HIT-CE: ready to plug-in, ECG to be ordered separately
- ☒ color: silver, RAL

ECG	120V 60 Hz
IP20	



LM	Wattage		Order No.	DS		ET	LVK	lb	
	TC-DEL / G24q-1 2 x10/13 W		<a href="#">SCEH 201.50 GE10</a>	0.04"-1.4"	7.4"-7.4"	4.1"	237	6.2	ECG
	TC-DEL / G24q-2 2 x18 W		<a href="#">SCEH 201.60 GE10</a>	0.04"-1.4"	7.4"-7.4"	4.1"	237	6.2	ECG
	TC-DEL / G24q-3 2 x26 W		<a href="#">SCEH 201.80 GE10</a>	0.04"-1.4"	8.7"-8.7"	4.3"	277	7.7	ECG
	HIT-CE / G12 1 x35/70 W	40°	<a href="#">SCEH 201.70 G10</a>	0.04"-1.4"	7.4"-7.4"	4.7"	237	5.5	
	UV filter Power supply unit:								
			ECG	35 W	<a href="#">CVGKE360</a>				
				70 W	<a href="#">CVGKE710</a>				
			CCG	35 W	<a href="#">CVG350</a>				
				70 W	<a href="#">CVG700</a>				

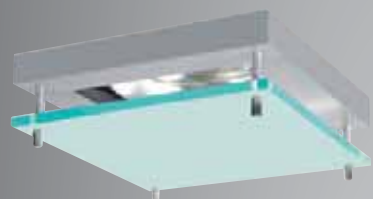


**SCEH201** | semi-recessed downlights | with frosted glass

- ☒ same as above
- ☒ decorative glass frosted, no-tool fastening

ECG	120V 60 Hz
IP20	

LM	Wattage		Order No.	DS		ET	LVK	lb	
	TC-DEL / G24q-1 2 x10/13 W		<a href="#">SCEH 201.50 GE11</a>	0.04"-1.4"	7.4"-7.4"	4.1"	237	6.2	ECG
	TC-DEL / G24q-2 2 x18 W		<a href="#">SCEH 201.60 GE11</a>	0.04"-1.4"	7.4"-7.4"	4.1"	237	6.2	ECG
	TC-DEL / G24q-3 2 x26 W		<a href="#">SCEH 201.80 GE11</a>	0.04"-1.4"	8.7"-8.7"	4.3"	277	7.7	ECG
	HIT-CE / G12 1 x35/70 W	40°	<a href="#">SCEH 201.70 G11</a>	0.04"-1.4"	7.4"-7.4"	4.7"	237	5.5	
	UV filter Power supply unit:								
			ECG	35 W	<a href="#">CVGKE360</a>				
				70 W	<a href="#">CVGKE710</a>				
			CCG	35 W	<a href="#">CVG350</a>				
				70 W	<a href="#">CVG700</a>				

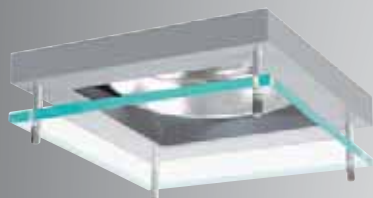

**SCEH201** | Halbeinbau-Downlights | with clear glass

- ☒ same as above
- ☒ decorative glass clear, no-tool fastening

ECG	120V 60 Hz
IP20	


LM	Wattage		Order No.	DS		ET	LVK	lb	
	TC-DEL / G24q-1 2 x10/13 W		<a href="#">SCEH 201.50 GE12</a>	0.04"-1.4"	7.4"-7.4"	4.1"	237		
	TC-DEL / G24q-2 2 x18 W		<a href="#">SCEH 201.60 GE12</a>	0.04"-1.4"	7.4"-7.4"	4.1"	237		
	TC-DEL / G24q-3 2 x26 W		<a href="#">SCEH 201.80 GE12</a>	0.04"-1.4"	8.7"-8.7"	4.3"	277		
	HIT-CE / G12 1 x35/70 W	40°	<a href="#">SCEH 201.70 G12</a>	0.04"-1.4"	7.4"-7.4"	4.7"	237		
	UV filter Power supply unit:								
			ECG	35 W	<a href="#">CVGKE360</a>				
				70 W	<a href="#">CVGKE710</a>				
			CCG	35 W	<a href="#">CVG350</a>				
				70 W	<a href="#">CVG700</a>				



# Piazza

The light windows in rectangular shape are particularly suitable for ambient illumination with a distinctive effect. Piazza in stainless steel is right in the trend.



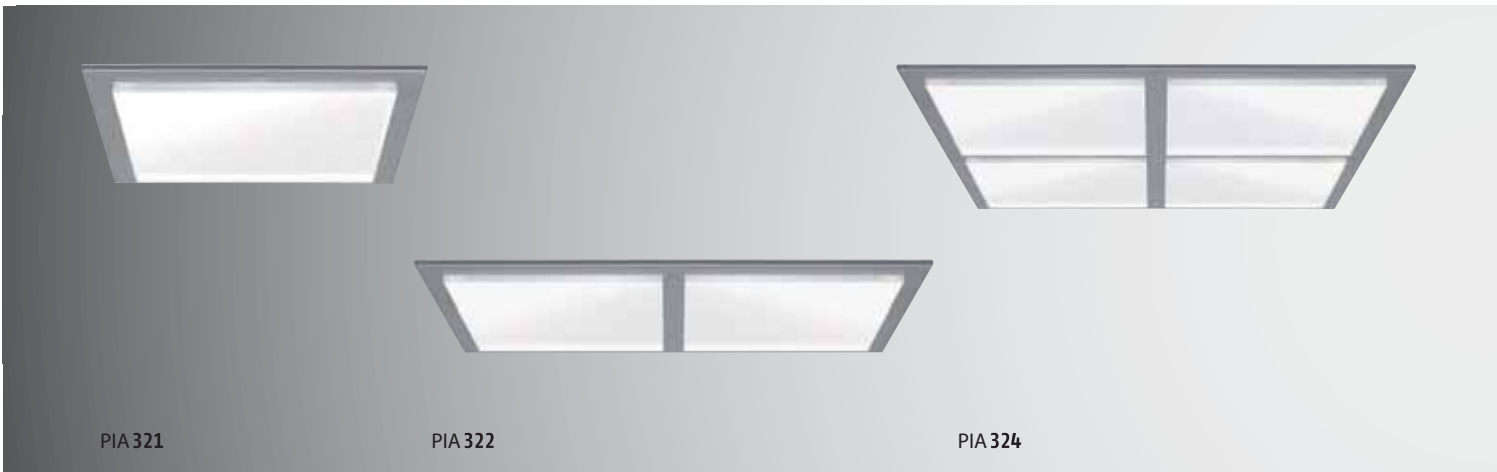

PIA 321

PIA 322

PIA 324

- no-tool mounting of the luminaire housing via adjustable clamping wings
- cover frame with snap-in fastening and safety wire with carabiner
- luminaire housing and cover frame made from metal, cover frame also available in stainless steel
- acrylic matt protruding around 0.4"
- lamp position horizontal
- ready to plug-in to ECG
- ECG to be ordered separately
- color: silver, white, stainless steel, RAL


**PIA 321 | recessed downlight | acrylic protruding**



- concrete casting surround for fairfaced concrete available as accessories
- concrete casting surround made from hot-dip galvanised metal




LM	Wattage	Order No.	DS		ET	LVK	lb
TC-TEL / GX 24q-3-4	1 x 26/32/42 W	PIA 321.50	0.04"-1.2"	8.1"-8.1"	4.3"	386	5.3
Power supply unit:	ECG	CVGB20					
Accessories Concrete casting surround:		BT PIA301					

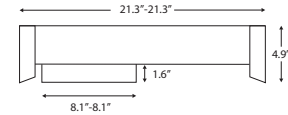

**PIA 322 | recessed downlight | acrylic protruding**




LM	Wattage	Order No.	DS		ET	LVK	lb
TC-TEL / GX 24q-3-4	2 x 26/32/42 W	PIA 322.50	0.04"-1.2"	15.9"-8.1"	4.3"	386	9.7
Power supply unit:	ECG	PPE2.32/42					



**PIA 324 | recessed downlight | acrylic protruding**



LM	Wattage	Order No.	DS		ET	LVK	lb
TC-TEL / GX 24q-3-4	4 x 26/32/42 W	PIA 324.50	0.04"-1.2"	15.9"-15.9"	4.3"	386	16.3
Power supply unit:	ECG	PPE4.42					





PIA 301

PIA 302

PIA 304

- ☑ no-tool mounting of the luminaire housing via adjustable clamping wings
- ☑ cover frame with snap-in fastening and safety wire with carabiner
- ☑ luminaire housing and cover frame made from metal, cover frame also available in stainless steel
- ☑ decorative white flashed opal glass (toughened safety glass), flush with cover frame
- ☑ reflector with highly polished structure made from highest-grade aluminium
- ☑ lamp position horizontal
- ☑ ready to plug-in to ECG
- ☑ ECG to be ordered separately
- ☑ color: silver, white, stainless steel, RAL

**PIA 301 | recessed downlight | glass flush**

120V  
60 Hz


IP20

CE

- ☑ concrete casting surround for fairfaced concrete available as accessories
- ☑ concrete casting surround made from hot-dip galvanised metal



LM	Wattage	Order No.	DS	ET	LVK	lb
TC-TEL / GX24q-3-4 Power supply unit:	1 x 26/32/42 W ECG	PIA 301.50 CVGB20	0.04"-1.2"	8.1"x8.1"	4.3"	385 4.4
HIT-CE / G12 Power supply unit:	1 x 35/70 W ECG 35 W 70 W CCG 35 W 70 W	PIA 301.30 CVGKE360 CVGKE710 CVG 350 CVG 700	0.04"-1.2"	8.1"x8.1"	4.3"	385 2.9

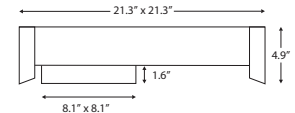


Accessories Concrete casting surround: BT PIA301

**PIA 302 | recessed downlight | glass flush**

120V  
60 Hz

IP20

CE




LM	Wattage	Order No.	DS	ET	LVK	lb
TC-TEL / GX24q-3-4 Power supply unit:	2 x 26/32/42 W ECG	PIA 302.50 PPE2.32/42	0.04"-1.2"	16.2"x8.1"	4.3"	1 x 385 7.3
HIT-CE / G12 Power supply unit:	2 x 35/70 W ECG 35 W 70 W CCG 35 W 70 W	PIA 302.30 PPE2.350 PPE2.700 PP2.350 PP2.700	0.04"-1.2"	16.2"x8.1"	4.3"	2 x 385 5.5

**PIA 304 | recessed downlight | glass flush**

120V  
60 Hz

IP20


CE



LM	Wattage	Order No.	DS	ET	LVK	lb
TC-TEL / GX24q-3-4 Power supply unit:	4 x 26/32/42 W ECG	PIA 304.50 PPE4.42	0.04"-1.2"	16.2"x16.2"	4.3"	1 x 385 12.3
HIT-CE / G12 Power supply unit:	4 x 35/70 W ECG 35 W 70 W CCG 35 W 70 W	PIA 304.30 2 x PPE2.350 2 x PPE2.700 2 x PP2.350 2 x PP2.700	0.04"-1.2"	16.2"x16.2"	4.3"	4 x 385 13.2



- ☑ no-tool mounting of the luminaire housing via adjustable clamping wings
- ☑ cover frame with snap-in fastening and safety wire with carabiner
- ☑ luminaire housing and cover frame made from metal, cover frame also available in stainless steel
- ☑ decorative white flashed opal glass (toughened safety glass), flush with cover frame
- ☑ reflector with highly polished structure made from highest-grade aluminium
- ☑ lamp position horizontal
- ☑ ready to plug-in to ECG
- ☑ ECG to be ordered separately
- ☑ color: silver, white, stainless steel, RAL



■ **PIA 402** | recessed downlight | glass flush

120V  
60 Hz

IP20

CE

LM	Wattage	Order No.	DS	ET	LVK	lb
☛ TC-TEL / GX24q-3-4	2 x 26/32 W	<a href="#">PIA 402.50</a>	0.04"-1.2"	11.0"x11.0"	4.3"	387 7.9
Power supply unit:	☛ ECG	<a href="#">PPE2.32/42</a>				



Thomas Gruppe, Gelsenkirchen




PIA 200



PIA 210

- ° no-tool ceiling recess of the luminaire housing via adjustable clamping springs
- ° cover frame with snap-in fastening
- ° luminaire housing and cover frame made from metal, cover frame also available in stainless steel

- ° reflector with highly polished structure made from highest-grade aluminium
- ° LCG integrated in luminaire, ECG as separate unit
- ° concrete casting surround and casting surround for plastering made from hot-dip galvanised metal
- ° color: silver, white, stainless steel, RAL




**PIA 200 | recessed downlight | glass flush**




☒ decorative white flashed opal glass (toughened safety glass), flush  
 ☒ PIA 200.18: 3-pole terminal block (ECG versions with 5-pole connection box), PIA 200.60: 2-pole terminal block

LM	Wattage	Order No.	DS	ET	LVK
QT-DE 11 / 12/R7s Contact gap 2.9"	1 x 60 W	PIA 200.60	0.04"-1.0"	5.9"-5.9"	4.7" 383
TC-D / G 24d-2	1 x 18 W LCG	PIA 200.18	0.04"-1.0"	5.9"-5.9"	4.7" 383
TC-DEL / G 24q-2	1 x 18 W ECG	PIA 200.18 E	0.04"-1.0"	5.9"-5.9"	4.7" 383
	1 x 18 W ECG dim.	PIA 200.18 DIM/1-10	0.04"-1.0"	5.9"-5.9"	4.7" 383
	1 x 18 W ECG dim.	PIA 200.18 DIM/DIG	0.04"-1.0"	5.9"-5.9"	4.7" 383
	1 x 18 W ECG dim.	PIA 200.18 DIM/DALI	0.04"-1.0"	5.9"-5.9"	4.7" 383



Accessories Concrete casting surround only for PIA 200.60 and PIA200.18:  
 Casting Surround only for PIA 200.60 and PIA200.18:

[BT PIA 200](#)  
[ME PIA 200](#)





**PIA 210 | recessed downlight | asymmetrical**



° asymmetrical light outlet  
 ° decorative white flashed opal glass (toughened safety glass), oblique position 20°  
 ° PIA 210.18: 3-pole terminal block (ECG versions with 5-pole connection box), PIA 210.60: 2-pole terminal block

LM	Wattage	Order No.	DS	ET	LVK
QT-DE 11 / 12/R7s Contact gap 2.9"	1 x 60 W	PIA 210.60	0.04"-1.0"	5.9"-5.9"	4.7" 384
TC-D / G 24d-2	1 x 18 W LCG	PIA 210.18	0.04"-1.0"	5.9"-5.9"	4.7" 384
TC-DEL / G 24q-2	1 x 18 W ECG	PIA 210.18 E	0.04"-1.0"	5.9"-5.9"	4.7" 384
	1 x 18 W ECG dim.	PIA 210.18 DIM/1-10	0.04"-1.0"	5.9"-5.9"	4.7" 384
	1 x 18 W ECG dim.	PIA 210.18 DIM/DIG	0.04"-1.0"	5.9"-5.9"	4.7" 384
	1 x 18 W ECG dim.	PIA 210.18 DIM/DALI	0.04"-1.0"	5.9"-5.9"	4.7" 384




Accessories Concrete casting surround only for PIA 210.60 and PIA210.18:  
 Casting Surround only for PIA 210.60 and PIA210.18:

[BT PIA 200](#)  
[ME PIA 200](#)



- ☑ luminaire available with acrylic opal-white or frosted
- ☑ no-tool ceiling recess of the luminaire housing via adjustable clamping springs
- ☑ cover frame with snap-in fastening
- ☑ luminaire housing and cover frame made from metal, cover frame also available in stainless steel
- ☑ acrylic made from UV- and heat-resistant PMMA, protruding by 0.7"

- ☑ reflector with highly polished structure made from highest-grade aluminium
- ☑ LCG integrated in luminaire, ECG as separate unit
- ☑ LCG: 3-pole terminal block, ECG versions: 5-pole connection box
- ☑ concrete casting surround and casting surround for plastering made from hot-dip galvanised metal
- ☑ color: silver, white, stainless steel, RAL




**PIA 220 | recessed downlight | acrylic protruding**




LM	Wattage	acrylic	☑	Order No.	DS	☑	ET	LVK
☑ TC-D / G24d-2 TC-DEL / G24q-2	1 x18 W	opal-white	LCG	<a href="#">PIA 220.18</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382
	1 x18 W	opal-white	ECG	<a href="#">PIA 220.18 E</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382
	1 x18 W	opal-white	ECG dim.	<a href="#">PIA 220.18 DIM/1-10</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382
	1 x18 W	opal-white	ECG dim.	<a href="#">PIA 220.18 DIM/DIG</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382
	1 x18 W	opal-white	ECG dim.	<a href="#">PIA 220.18 DIM/DALI</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382
☑ TC-D / G24d-2 TC-DEL / G24q-2	1 x18 W	frosted	LCG	<a href="#">PIA 225.18</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382
	1 x18 W	frosted	ECG	<a href="#">PIA 225.18 E</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382
	1 x18 W	frosted	ECG dim.	<a href="#">PIA 225.18 DIM/1-10</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382
	1 x18 W	frosted	ECG dim.	<a href="#">PIA 225.18 DIM/DIG</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382
	1 x18 W	frosted	ECG dim.	<a href="#">PIA 225.18 DIM/DALI</a>	0.04"-1.0"	5.9"x5.9"	4.7"	382

BT PIA 200



ME PIA 200



Accessories Concrete casting surround only for PIA220.18 and PIA225.18: [BT PIA200](#)  
 Casting surround only for PIA 220.18 and PIA225.18: [ME PIA 200](#)





# solavanti lighting



SOLAVANTI LIGHTING, LLC

Dallas, Texas

Tel.: 1.866.356.4458

Fax: 1.866.516.1924

[www.solavantilighting.com](http://www.solavantilighting.com)