



solavanti lighting



PERFORMANCE¹⁰

LTS[®]
LIGHT & LUMINAIRES

CA

			
Decorative Attachments 414	CA 416	CAF 417	Semi-recessed 418

CA50 /60

			
CA62 421	CA50 421	CA65 422	CA66 422
			
CA60 423	CA51 423		





XP100 /200 /300

					
XP100 425	XP150 425				
					
XP210 426	XP220 426	XP230 426			
					
XP310 427	XP320 427	XP330 427	XP200 428	XP300 428	

Piazza

			
Piazza351 429	Piazza371 429	Piazza601 429	Piazza621 429

XP500


			
XP500 431	XP510 431	XP550 431	XP560 431



CA 2/3

LTS surface-mounted downlights are available in different sizes, diameters and wattages. Furthermore, these LTS surface-mounted downlights can be fitted without tools with decorative accessories.



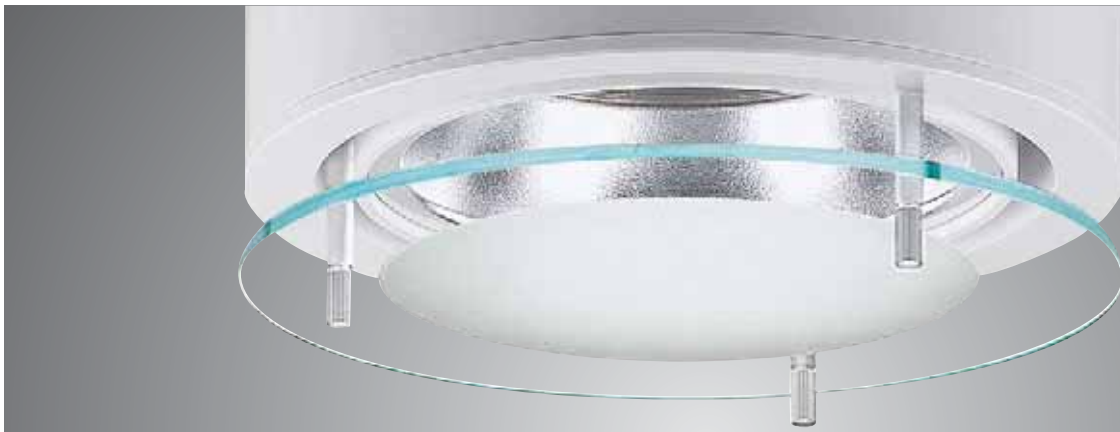

☒ no-tool installation
(AD = outer diameter)

illustrations surface-mounted downlights

■ CDZ | decorative attachments



.01 Glass pane matt finished centre (toughened safety glass), recessed (IP20)

for AD 7.3" 8.8"

CD22.01 CD23.01
only for luminaires with lamps up to 18 W (TC lamp)



.60 Acrylic pane matt finished centre, recessed (IP20)

for AD 7.3" 8.8"

CD22.60 CD23.60
only for luminaires with lamps up to 18 W (TC lamp)



.38 Glass pane matt finished (toughened safety glass), recessed (IP20)

for AD 7.3" 8.8"

CD22.38 CD23.38
only for luminaires with lamps up to 18 W (TC lamp)



.61 Acrylic pane matt finished, recessed (IP20)

for AD 7.3" 8.8"

CD22.61 CD23.61
only for luminaires with lamps up to 18 W (TC lamp)



.39 Glass pane clear (toughened safety glass), recessed (IP20)

for AD 7.3" 8.8"

CD22.39 CD23.39
only for luminaires with lamps up to 18 W (TC lamp)



.62 Acrylic pane clear, recessed (IP20)

for AD 7.3" 8.8"

CD22.62 CD23.62
only for luminaires with lamps up to 18 W (TC lamp)



.02 Glass ring blue (toughened safety glass), recessed

for AD 7.3" 8.8"

CD22.02 CD23.02



.32 Glass ring green (toughened safety glass), recessed
 for AD 7.3" 8.8"
[CDZ2.32](#) [CDZ3.32](#)



.35 Glass ring matt finish (toughened safety glass), recessed
 for AD 7.3" 8.8"
[CDZ2.35](#) [CDZ3.35](#)



.08 Glass ring matt finish (toughened safety glass), attached
 for AD 7.3" 8.8"
[CDZ2.08](#) [CDZ3.08](#)



.63 Acrylic ring matt finish, attached
 for AD 7.3" 8.8"
[CDZ2.63](#) [CDZ3.63](#)




.03 Glass pane matt finished centre (toughened safety glass), attached
 for AD 7.3" 8.8"
[CDZ2.03](#) [CDZ3.03](#)



.29 Glass pane matt finish (toughened safety glass), attached
 for AD 7.3" 8.8"
[CDZ2.29](#) [CDZ3.29](#)



.64 Acrylic pane matt finished centre, attached
 for AD 7.3" 8.8"
[CDZ2.64](#) [CDZ3.64](#)

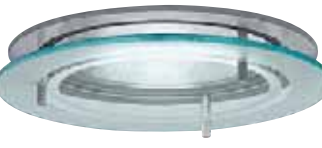

.05 Glass pane with 2 rings matt finish, attached, toughened safety glass
 for AD 7.3" 8.8"
[CDZ2.05](#) [CDZ3.05](#)



.10 Glass ring blue (toughened safety glass), attached
 for AD 7.3" 8.8"
[CDZ2.10](#) [CDZ3.10](#)




.30 Glass ring green (toughened safety glass), attached
 for AD 7.3" 8.8"
[CDZ2.30](#) [CDZ3.30](#)



- ☑ direct ceiling mounting via metal plate with bayonet catch and safety wire with carabiner
- ☑ reflector with snap-in fastening
- ☑ housing made from high-grade aluminium, front ring made from UV- and heat-resistant polycarbonate
- ☑ reflector with highly polished effect made from highest-grade aluminium, reflector cone satinated with UV filter for HIT-CE versions

- ☑ power supply unit integral, LCG compensated, CCG compensated with igniter
- ☑ 3-pole terminal block
- ☑ downlight with compact fluorescent lamps also available with emergency lighting
- ☑ no-tool retrofittable, decorative attachments available
- ☑ color: silver, white, RAL



■ CA | surface-mounted downlights



LM	Wattage	AD	⚡	Order No.	h/in	LVK	
☑	TC-D / G 24d-1	1 x10/13 W	7.3"	LCG	CA 2.113*	8.9"	165
	TC-DEL / G24q-1	1 x10/13 W	7.3"	ECG	CAE 2.113*	8.9"	165
☑	TC-D / G 24d-2	1 x18 W	7.3"	LCG	CA 2.118*	8.9"	165
	TC-DEL / G24q-2	1 x18 W	7.3"	ECG	CAE 2.118*	8.9"	165

Decorative attachments p. 414

.01 .02 .03 .05 .08 .10 .29 .30 .32 .35 .38 .39 .60 .61 .62 .63 .64

☑	TC-T / GX 24d-3 Osram	1 x26 W	7.3"	LCG	CA 2.126*	8.9"	165
	TC-TEL / GX24q-3	1 x26/32 W	7.3"	ECG	CAE 2.132*	8.9"	165
	TC-TEL / GX24q-4	1 x42 W	7.3"	ECG	CAE 2.142*	9.6"	174

Decorative attachments p. 414

.02 .03 .05 .08 .10 .29 .30 .32 .35 .63 .64

☑	HIT-CE / G 12 UVfilter	1 x35 W	7.3"	60°	CCG	CA 2.351	8.9"	165
		1 x70 W	7.3"	60°	CCG	CA 2.701	8.9"	165

Decorative attachments p. 414

.02 .03 .08 .10 .29 .30 .32 .35 .63

☑	QT 32 / m / E27	1 x75 W	7.3"	45°		CA 2.750	7.5"	165
---	-----------------	---------	------	-----	--	----------	------	-----


Decorative attachments p. 414

.02 .08 .10 .30 .32 .35 .63










- ☒ direct ceiling mounting
- ☒ housing made from high-grade aluminium, front ring made from UV- and heat-resistant polycarbonate
- ☒ reflector and 6-cell louvre with highly polished effect made from highest-grade aluminium
- ☒ power supply unit integral, LCG compensated
- ☒ ECG or LCG version with 3-pole terminal block, dimmable ECG versions with 5-pole terminal block

- ☒ downlight also available with emergency lighting
- ☒ no-tool retrofittable, decorative attachments available (not for CAFT)
- ☒ color: silver, white, RAL



CAF | surface-mounted downlights | low version



6-cell louvre


LM	Wattage	AD	⚡	Order No.	LVK
☒ TC-D / G 24d-1 TC-DEL / G 24q-1	2 x10/13 W	8.8"	LCG	CAFT 3. 213	216
		8.8"	ECG	CAFTE 3. 213	216
		8.8"	ECG dim.	CAFT DIM 3. 213/1- 10	216
		8.8"	ECG dim.	CAFT DIM 3. 213/DIG	216
		8.8"	ECG dim.	CAFT DIM 3. 213/DALI	216
☒ TC-D / G 24d-2 TC-DEL / G 24q-2	2 x18 W	8.8"	LCG	CAFT 3. 218	216
		8.8"	ECG	CAFTE 3. 218	216
		8.8"	ECG dim.	CAFT DIM 3. 218/1- 10	216
		8.8"	ECG dim.	CAFT DIM 3. 218/DIG	216
		8.8"	ECG dim.	CAFT DIM 3. 218/DALI	216
No decorative attachments available!					
☒ TC-D / G 24d-1 TC-DEL / G 24q-1	2 x10/13 W	8.8"	LCG	CAF 3. 213	215
		8.8"	ECG	CAFE 3. 213	215
		8.8"	ECG dim.	CAF DIM 3. 213/1- 10	215
		8.8"	ECG dim.	CAF DIM 3. 213/DIG	215
		8.8"	ECG dim.	CAF DIM 3. 213/DALI	215
☒ TC-D / G 24d-2 TC-DEL / G 24q-2	2 x18 W	8.8"	LCG	CAF 3. 218	215
		8.8"	ECG	CAFE 3. 218	215
		8.8"	ECG dim.	CAF DIM 3. 218/1- 10	215
		8.8"	ECG dim.	CAF DIM 3. 218/DIG	215
		8.8"	ECG dim.	CAF DIM 3. 218/DALI	215
Decorative attachments p. 414 .01 .02 .03 .05 .08 .10 .29 .30 .32 .35 .38 .39 .60 .61 .62 .63 .64					
☒ TC-D / G 24d-3 TC-DEL / G 24q-3	2 x26 W	8.8"	LCG	CAF 3. 226	300
		8.8"	ECG	CAFE 3. 226	300
		8.8"	ECG dim.	CAF DIM 3. 226/1- 10	300
		8.8"	ECG dim.	CAF DIM 3. 226/DIG	300
		8.8"	ECG dim.	CAF DIM 3. 226/DALI	300

Decorative attachments:
 CDZ 30.38 Glass pane matt finished, recessed



- ☒ direct ceiling mounting via metal ring with bayonet catch and safety wire with carabiner
- ☒ housing made from high-grade aluminium, front ring made from UV- and heat-resistant polycarbonate
- ☒ reflector with highly polished effect made from highest-grade aluminium, HIT-CE version with UV filter
- ☒ power supply unit integral, CCG compensated and with igniter
- ☒ ECG or CCG version with 3-pole terminal block, dimmable ECG versions ready for connection

- ☒ downlight also available with emergency lighting
- ☒ no-tool retrofittable, decorative attachments available
- ☒ color: silver, white, RAL



■ CAH | semi-recessed downlights



LM	Wattage	AD	⚡	Order No.	ET	LVK	h/in
TC-DEL / G 24q-1	2 x10/13 W	8.8"	ECG	CAHE 3.213*	6.9"	2.2"	215 3.0"
TC-DEL / G 24q-2	2 x18 W	8.8"	ECG	CAHE 3.218*	6.9"	2.2"	215 3.0"
		8.8"	ECG dim.	CAH DIM 3.218/1-10*	6.9"	2.2"	215 3.0"
		8.8"	ECG dim.	CAH DIM 3.218/DIG*	6.9"	2.2"	215 3.0"
		8.8"	ECG dim.	CAH DIM 3.218/DALI*	6.9"	2.2"	215 3.0"

Decorative attachments p. 414

.01 .02 .03 .05 .08 .10 .29 .30 .32 .35 .38 .39 .60 .61 .62 .63 .64



LM	Wattage	AD	⚡	Order No.	ET	LVK	h/in
HIT-CE / G 12 UV filter	1 x35 W	8.8"	CCG	CAH 3.351	175	2.6"	35° 220 3.9"
	1 x70 W	8.8"	CCG	CAH 3.701	175	2.6"	35° 220 3.9"

Decorative attachments p. 414


.02 .03 .05 .08 .10 .29 .30 .32 .35 .63



Carl Benz Center, Stuttgart



Wöhrl, Landshut



CA Surface-mounted
downlights - a class of
its own. The decorative
integral acrylic ring
with or without cross
louvre accounts for the
elegant effect of these
luminaires.


CA 50/60

CA 20/30



- ☒ direct ceiling mounting
- ☒ housing made from high-grade aluminium, light effect ring made from acrylic in sand-blast effect
- ☒ reflector matt anodised made from highest-grade aluminium

- ☒ ECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block
- ☒ color: silver, white



CA62 | surface-mounted downlight | light effect ring | TC-DEL


ECG	120V 60 Hz	IP20
	Dimming	DALI

LM	Wattage	AD		Order No.	LVK
TC-DEL / G 24q-2	2 x 18 W	7.9"	ECG	CA 62. 218	253
		7.9"	ECG dim.	CA 62. 218 DIM/1- 10	253
		7.9"	ECG dim.	CA 62. 218 DIM/DIG	253
		7.9"	ECG dim.	CA 62. 218 DIM/DALI	253



- ☒ direct ceiling mounting
- ☒ housing made from high-grade aluminium, light effect ring made from acrylic in sand-blast effect
- ☒ 3-pole terminal block

- ☒ Use only QPAR 30 with length = 3.6" and Ø = 3.8"
- ☒ color: silver, white



CA50 | surface-mounted downlight | light effect ring | QPAR30


120V 60 Hz	IP20	
---------------	------	--

LM	Wattage	AD	Order No.
QPAR30 / E27	75 W	5.5"	CA 50. 175



- ☑ direct ceiling mounting
- ☑ housing made from high-grade aluminium, decor ring made from acrylic in sand-blast effect
- ☑ reflector matt anodised made from highest-grade aluminium

- ☑ ECG integral with 3-pole terminal block
- ☑ dimmable ECG with 5-pole terminal block
- ☑ color: silver, white



CA65 | surface-mounted downlight | acrylic decor | TC-DEL


ECG	120V 60 Hz	IP20
CE	Dimming	DALI

LM	Wattage	AD	⚡	Order No.	LVK
☛ TC-DEL / G 24q-2	2 x18 W	7.9"	ECG	CA 65. 218	252
		7.9"	ECG dim.	CA 65. 218 DIM/1- 10	252
		7.9"	ECG dim.	CA 65. 218 DIM/DIG	252
		7.9"	ECG dim.	CA 65. 218 DIM/DALI	252



- ☑ direct ceiling mounting
- ☑ housing made from high-grade aluminium
- ☑ decor ring made from acrylic in sand-blast effect, highly polished 4-cell louvre made from aluminium

- ☑ reflector matt anodised made from highest-grade aluminium
- ☑ ECG integral with 3-pole terminal block
- ☑ dimmable ECG with 5-pole terminal block
- ☑ color: silver, white



CA66 | surface-mounted downlight | acrylic decor&louvre | TC-DEL


ECG	120V 60 Hz	IP20
CE	Dimming	DALI

LM	Wattage	AD	⚡	Order No.	LVK
☛ TC-DEL / G 24q-2	2 x18 W	7.9"	ECG	CA 66. 218	254
		7.9"	ECG dim.	CA 66. 218 DIM/1- 10	254
		7.9"	ECG dim.	CA 66. 218 DIM/DIG	254
		7.9"	ECG dim.	CA 66. 218 DIM/DALI	254



- ☒ direct ceiling mounting
- ☒ housing made from high-grade aluminium
- ☒ reflector matt anodised made from highest-grade aluminium
- ☒ ECG integral with 3-pole terminal block

- ☒ dimmable ECG with 5-pole terminal block
- ☒ color: silver, white



CA60 | surface-mounted downlight | TC-DEL


ECG	120V 60 Hz	IP20
CE	Dimming	DALI

LM	Wattage	AD		Order No.	LVK
TC-DEL / G 24q-2	2 x 18 W	7.9"	ECG	CA 60. 218	218
		7.9"	ECG dim.	CA 60. 218 DIM/1- 10	218
		7.9"	ECG dim.	CA 60. 218 DIM/DIG	218
		7.9"	ECG dim.	CA 60. 218 DIM/DALI	218



- ☒ direct ceiling mounting
- ☒ housing made from high-grade aluminium
- ☒ 3-pole terminal block
- ☒ Use only QPAR 30 with length = 90.5 mm and Ø = 97 mm

- ☒ colour: silver, white



CA51 | surface-mounted downlight | QPAR 30

120V 60 Hz	IP20	CE
---------------	------	----

LM	Wattage	AD	Order No.
QPAR30 / E27	75 W	5.5"	CA 51. 175



XP


XP surface-mounted luminaires in square design meet today's modern architecture. The square shaped light cubes offer a large number of combinations and allow for scope.





- ☒ direct ceiling mounting
- ☒ housing made from metal
- ☒ 3-pole terminal block

☒ color: silver, white



■ **XP100** | surface-mounted downlight | QPAR30

120V
60 Hz




LM	Wattage	Order No.
QPAR30 / E27	75 W	XP 100.175



- ° direct ceiling mounting on bevels
- ° luminaire adjustable from 0° – 45°
- ° housing made from metal

- ° 3-pole terminal block
- ° color: silver, white



■ **XP150** | surface-mounted downlight | for bevels | QPAR30

120V
60 Hz



LM	Wattage	Order No.
QPAR30 / E27	75 W	XP 150.175






XP210 | surface-mounted downlight | acrylic cover | TC-DEL | height150

- ☑white acrylic cover
- ☑direct ceiling mounting
- ☑housing made from metal
- ☑reflector with matt structure made from highest-grade aluminium
- ☑ECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block
- ☑color: silver, white

ECG	120V 60 Hz	IP20
CE	Dimming	DALI




LM	Wattage		Order No.	LVK
TC-DEL / G 24q-2	2 x18 W	ECG	XP 210.218	352
		ECG dim.	XP 210.218 DIM/1-10	352
		ECG dim.	XP 210.218 DIM/DIG	352
		ECG dim.	XP 210.218 DIM/DALI	352



XP220 | surface-mounted downlight | light effect decor | TC-DEL | height170

- fflight effect decor frame made from acrylic in sand-blast effect
- ffdirect ceiling mounting
- ffhousing made from metal
- ffreflector with matt structure made from highest-grade aluminium
- ffECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block
- ffcolor: silver, white

ECG	120V 60 Hz	IP20
CE	Dimming	DALI




LM	Wattage		Order No.	LVK
TC-DEL / G 24q-2	2 x18 W	ECG	XP 220.218	353
		ECG dim.	XP 220.218 DIM/1-10	353
		ECG dim.	XP 220.218 DIM/DIG	353
		ECG dim.	XP 220.218 DIM/DALI	353



XP230 | surface-mounted downlight | acrylic decor | TC-DEL | height180

- ffdecor frame made from acrylic in sand-blast effect
- ffdirect ceiling mounting
- ffhousing made from metal
- ffreflector with matt structure made from highest-grade aluminium
- ffECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block
- ffcolor: silver, white



ECG	120V 60 Hz	IP20
CE	Dimming	DALI



LM	Wattage		Order No.	LVK
TC-DEL / G 24q-2	2 x18 W	ECG	XP 230.218	354
		ECG dim.	XP 230.218 DIM/1-10	354
		ECG dim.	XP 230.218 DIM/DIG	354
		ECG dim.	XP 230.218 DIM/DALI	354

XP310 | surface-mounted downlight | acrylic cover | TC-DEL | height 210



- ☑ white acrylic cover
- ☑ direct ceiling mounting
- ☑ housing made from metal
- ☑ reflector with matt structure made from highest-grade aluminium
- ☑ ECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block
- ☑ colour: silver, white



LM	Wattage	⚡	Order No.	LVK
TC-DEL / G24q-2	2 x18 W	ECG	XP 310. 218	357
		ECG dim.	XP 310. 218 DIM/1- 10	357
		ECG dim.	XP 310. 218 DIM/DIG	357
		ECG dim.	XP 310. 218 DIM/DALI	357

XP320 | surface-mounted downlight | light effect decor | TC-DEL | height 230



- ☑ light effect decor frame made from acrylic in sand-blast effect
- ☑ direct ceiling mounting
- ☑ housing made from metal
- ☑ reflector with matt structure made from highest-grade aluminium
- ☑ ECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block
- ☑ color: silver, white



LM	Wattage	⚡	Order No.	LVK
TC-DEL / G24q-2	2 x18 W	ECG	XP 320. 218	358
		ECG dim.	XP 320. 218 DIM/1- 10	358
		ECG dim.	XP 320. 218 DIM/DIG	358
		ECG dim.	XP 320. 218 DIM/DALI	358

XP330 | surface-mounted downlight | acrylic decor | TC-DEL | height 240

- ☑ decor frame made from acrylic in sand-blast effect
- ☑ direct ceiling mounting
- ☑ housing made from metal
- ☑ reflector with matt structure made from highest-grade aluminium
- ☑ ECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block
- ☑ color: silver, white




LM	Wattage	⚡	Order No.	LVK
TC-DEL/G 24q-2	2 x18 W	ECG	XP 330. 218	359
		ECG dim.	XP 330. 218 DIM/1- 10	359
		ECG dim.	XP 330. 218 DIM/DIG	359
		ECG dim.	XP 330. 218 DIM/DALI	359



XP 200 | surface-mounted downlight | TC-DEL | height 150

- ☑ direct ceiling mounting
- ☑ housing made from metal
- ☑ reflector with matt structure made from highest-grade aluminium
- ☑ ECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block
- ☑ color: silver, white

ECG	120V 60 Hz	IP20
CE	Dimming	DALI




LM	Wattage		Order No.	LVK
TC-DEL / G 24q-2	2 x 18 W	ECG	XP 200.218	351
		ECG dim.	XP 200.218 DIM/1-10	351
		ECG dim.	XP 200.218 DIM/DIG	351
		ECG dim.	XP 200.218 DIM/DALI	351

XP 300 | surface-mounted downlight | TC-DEL | height 210


- ☑ direct ceiling mounting
- ☑ housing made from metal
- ☑ reflector with matt structure made from highest-grade aluminium
- ☑ ECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block
- ☑ color: silver, white

ECG	120V 60 Hz	IP20
CE	Dimming	DALI



LM	Wattage		Order No.	LVK
TC-DEL / G 24q-2	2 x 18 W	ECG	XP 300.218	356
		ECG dim.	XP 300.218 DIM/1-10	356
		ECG dim.	XP 300.218 DIM/DIG	356
		ECG dim.	XP 300.218 DIM/DALI	356

Piazza

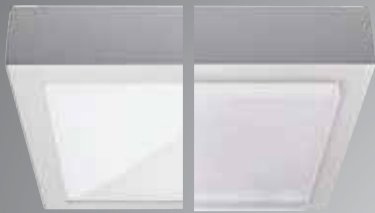


semi-recessed: glass flush acrylic protruding



surface-mounted: glass flush acrylic protruding

- no-tool mounting of the luminaire housing via adjustable clamping springs (PIA 351 / 371) or direct ceiling mounting (PIA 601 / 621)
- luminaire housing and cover frame made from metal, cover frame also available in stainless steel
- reflector with highly polished structure made from

- highest-grade aluminium
- ready to plug-in to ECG (PIA 351 / 371), ECG to be ordered separately
- ECG integral with 3-pole terminal block, dimmable ECG with 5-pole terminal block (PIA 601 / 621)
- color: silver, white, stainless steel




PIA 351 | semi-recessed luminaire | glass flush



- decorative white flashed opal glass (toughened safety glass), flush

LM	Wattage	Order No.	DS	ET	LVK	lb
TC-TEL / GX 24q-3-4	1 x 26/32/42 W	PIA 351.50	0.04"-1.0"	8.1"x8.1"	2.4"	385 4.4"
Power supply unit:		ECG	CVGB20			
HIT-CE / G 12	1 x 35/70 W	PIA 351.30	0.04"-1.0"	8.1"x8.1"	2.4"	385 4.4"
Power supply unit:		ECG 35 W	CVGKB60			
		70 W	CVGK710			




PIA 371 | semi-recessed luminaire | acrylic protruding



- acrylic matt protruding by 0.4"

LM	Wattage	Order No.	DS	ET	LVK	lb
TC-TEL / GX 24q-3-4	1 x 26/32/42 W	PIA 371.50	0.04"-1.0"	8.1"x8.1"	2.4"	386 5.3
Power supply unit:		ECG	CVGE320			




PIA 601 | surface-mounted luminaire | glass flush



- ECG integral with 3-pole or dimmable ECG with 5-pole terminal block

LM	Wattage	Order No.	LVK	lb
TC-DEL / G 24q-2	2 x 18 W	ECG	PIA 601.218	385 5.5
		ECG dim.	PIA 601.218 DIM/1-10	385 5.5
		ECG dim.	PIA 601.218 DIM/DALI	385 5.5



PIA 621 | surface-mounted luminaire | acrylic protruding



- acrylic matt protruding by 0.4"

LM	Wattage	Order No.	LVK	lb
TC-DEL / G 24q-2	2 x 18 W	ECG	PIA 621.218	386 6.2
		ECG dim.	PIA 621.218 DIM/1-10	386 6.2
		ECG dim.	PIA 621.218 DIM/DALI	386 6.2


XP 500



Flat, small ceiling and wall
luminaires with a homogenous,
borderless illumination are
decorative guidance luminaires.



XP 500

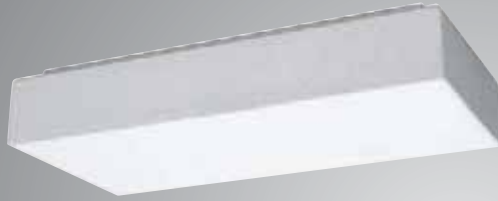

XP 510




XP 550



XP 560

- ☑ housing made from metal, white acrylic cover
- ☑ lamp with integral ECG included



XP 500 | ceiling/wall luminaire | 1-lamp


- ☑ direct ceiling or wall mounting
- ☑ 3-pole terminal block

120V
60 Hz

IP20

CE

LM	Wattage	Order No.	LVK
TC-DDSE / GRZ10d	1 x18 W	XP 500.118	238



XP 510 | ceiling/wall luminaire | 2-lamp


- ☑ direct ceiling or wall mounting
- ☑ 3-pole terminal block

120V
60 Hz

IP20

CE

LM	Wattage	Order No.	LVK
TC-DDSE / GRZ10d	2 x18 W	XP 510.218	555



XP 550 | wall luminaires


- ☑ luminaire for direct or direct-indirect illumination
- ☑ 3-pole terminal block

120V
60 Hz

IP20

CE

LM	Wattage	Illumination	Order No.	LVK
TC-DDSE / GRZ10d	1 x18 W	direct	XP 550.118	238
		direct / indirect	XP 555.118	239



XP 560 | pendant luminaire

- ☑ luminaire for direct illumination
- ☑ easy mounting via ceiling fastening with feeder
- ☑ ceiling rose made from polycarbonate
- ☑ pendant rod: length = 31.5", Ø = 0.4"
- ☑ luminaire ready for connection

120V
60 Hz

IP20

CE

LM	Wattage	Order No.	LVK
TC-DDSE / GRZ10d	1 x18 W	XP 560.118	238



solavanti lighting



SOLAVANTI LIGHTING, LLC

Dallas, Texas

Tel.: 1.866.356.4458

Fax: 1.866.516.1924

www.solavantilighting.com