



**solavanti** lighting



**PERFORMANCE**<sup>10</sup>

**LTS**<sup>®</sup>  
LIGHT & LUMINAIRES



# Wallarm Luminaires

## PX9



PXE 915 121



PXE 916 121

## Match



MAE700 122

## FLA



FLA 123

## SLHA



SLHA 123

## NAA



NAA Clipo 124



NAA Roy I 124



NAA Roy II 124




NAA Roy III 125

## Fastenings



Fastenings 125

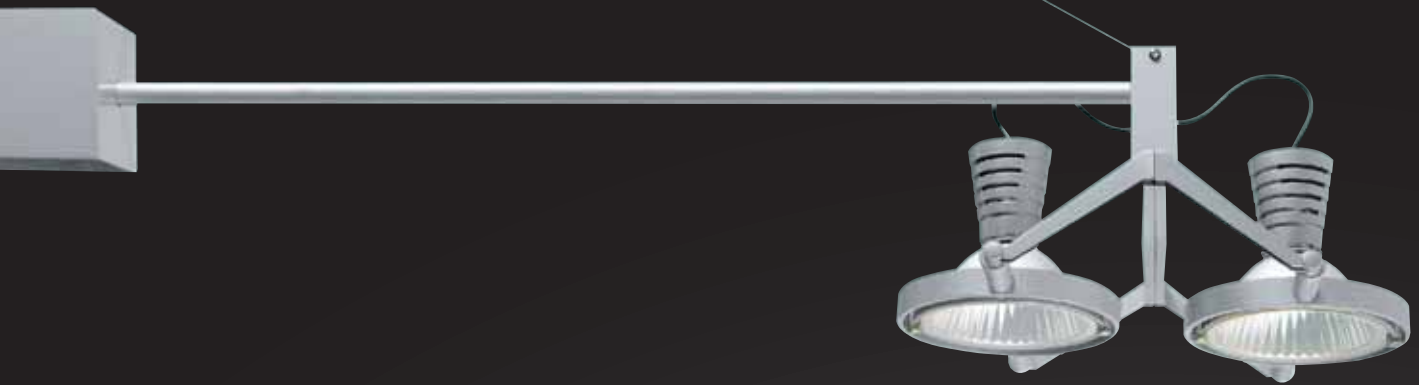

# Wallarm Luminaires


Wallarm luminaires from LTS are ideal for the illumination of racks as well as for booths and trade shows.

The wallarm luminaire MAE 700 is perfectly suited for hallways in shopping malls.


LTS is happy to customise your wallarm luminaire.



- ☑ wallarm spotlight for contact track or direct mounting
- ☑ specular reflectors made from highest-grade aluminium
- ☑ PRI reflector technique for glare-free light and maximum luminous efficiency
- ☑ light head pivotable
- ☑ easy relamping via socket holder with twist-off fastener
- ☑ socket holder made from polycarbonate, ECG housing made from high-grade aluminium, wallarm bow made from metal
- ☑ ECG integral for contact track spotlight, ECG to be ordered separately for direct mounting
- ☑ color: silver




**PXE 915/917 | HIT-TC-CE | 20/35 W**



LM	▲	LVK	Wattage	Contact tracks	lb	Wattage	Direct mounting	lb
HIT-TC-CE / G8.5	15°	115	35 W	<a href="#">PXE 917.3512</a>	7.5	20/35 W	<a href="#">PXE 915.3514</a>	6.8
	40° PRI	120		<a href="#">PXE 917.3522</a>	7.5		<a href="#">PXE 915.3524</a>	6.8
Power supply unit: included						Power supply unit:  ECG20W <a href="#">CVGME200</a> ECG35W <a href="#">CVGKE360</a>		



- ☑ wallarm spotlight for direct wall mounting
- ☑ specular reflector made from highest-grade aluminium
- ☑ PRI reflector technique for glare-free light and maximum luminous efficiency
- ☑ light head pivotable
- ☑ easy relamping via socket holder with twist-off fastener
- ☑ socket holder made from polycarbonate, ECG housing made from high-grade aluminium, wallarm bow made from metal
- ☑ ECG integral
- ☑ 3-pole terminal block
- ☑ colour: silver




**PXE 916 | HIT-TC-CE | 20/35 W**



LM Wattage	▲	Order No.	LVK	⚡	lb
HIT-TC-CE / G 8.5 20 W	15°	<a href="#">PXE 916.2013</a>	115	ECG	5.7
	40° PRI	<a href="#">PXE 916.2023</a>	120	ECG	5.7
HIT-TC-CE / G 8.5 35 W	15°	<a href="#">PXE 916.3513</a>	115	ECG	7.9
	40° PRI	<a href="#">PXE 916.3523</a>	120	ECG	7.9



- ☑ wallarm spotlight for direct mounting with additional steel cord support
- ☑ specular reflectors made from highest-grade aluminium
- ☑ PRI reflector technique for glare-free light and maximum luminous efficiency
- ☑ light heads move in all directions via gimbals
- ☑ easy relamping via socket holder with bayonet catch
- ☑ light heads, ECG housing and wallarm rod made from high-grade aluminium, socket holder made from polycarbonate
- ☑ ECG integral
- ☑ 3 -pole terminal block
- ☑ color: silver, white, RAL

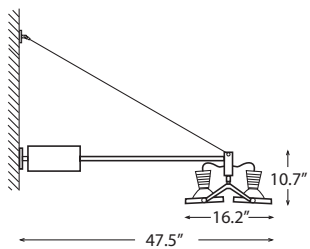

**MAE 700 | HIT-CE | 2 x 70 W**



LM	Wattage	▲	Order No.	LVK	⚡	lb	
	HIT-CE / G12	2 x 70 W	15° 25° 40° PRI 60° PRI	<a href="#">MAE 700.7011</a> <a href="#">MAE 700.7001</a> <a href="#">MAE 700.7021</a> <a href="#">MAE 700.7031</a>	2 x 195 2 x 195 2 x 195 2 x 195	ECG ECG ECG ECG	19.6 19.6 19.6 19.6



Accessories Color filters: red [FS630/146](#)  
orange [FS585/146](#)  
green [FS550/146](#)  
blue [FS535/146](#)  
yellow [FS525/146](#)






ideal for exhibitions

ideal for trade shows and exhibitions

**FLA | QT-DE11/12 | 300 W | Indoor & Outdoor**

- ☑ floodlight with wallarm (19.7") for wall mounting
- ☑ suitable for indoors or outdoors (IP30/IP33)
- ☑ asymmetrical reflector made from highest-grade aluminium with highly polished structure
- ☑ light head pivots through 90°
- ☑ easy relamping via removable glass
- ☑ luminaire unit made from die-cast, wall bracket housing made from polycarbonate, wallarm rod made from metal
- ☑ ready for connection
- ☑ color: white

safety glass	120V 60Hz
IP30/IP33	CE

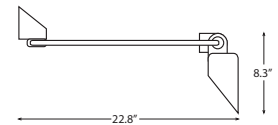


LM	Wattage	Order No.	lb
QT-DE11 / 12 / R7s Contact gap lamp: 4.5"	300 W	FLA 3000	3.1

**FLA | QT-DE11/12 | 300 W | Indoor**

- ☑ floodlight with adjustable wallarm (max. 19.7") and Clipo quick-fastening (clamping range: 0.7" - 1.0")
- ☑ suitable for indoors (IP20) only
- ☑ asymmetrical reflector made from highest-grade aluminium with highly polished structure
- ☑ light head pivots through 90°
- ☑ easy relamping via removable glass
- ☑ luminaire unit made from die-cast and polycarbonate, wallarm rod made from metal
- ☑ connection cable (78.7") with centre plug (according to the country)
- ☑ color: white

safety glass	120V 60Hz
IP20	CE




LM	Wattage	Order No.	lb
QT-DE 11 / 12 / R7s Contact gap lamp: 4.5"	300 W	FLA 3030	3.1

**SLHA | QT-DE11/12 | 200 W**

- ☑ spotlight with telescopic arm (23.6") and fastening clamp (clamping range: 1.8")
- ☑ reflector with wide beam angle made from highest-grade aluminium with highly polished structure
- ☑ light head pivotable
- ☑ easy relamping via removable UV filter
- ☑ housing made from high-grade aluminium, wallarm rod made from metal
- ☑ ready for connection
- ☑ color: white

UV filter	120V 60Hz
IP20	CE



LM	Wattage	Order No.	LVK	lb
QT-DE 11 / 12 / R7s Contact gap: 4.5"	200 W	SLHA 30001	350	3.1

- Accessories 1) Shutter blades: black, white [ZBK 21](#)  
2) Anti-dazzle louvre: white [ZBL 21](#)






**NAA Clipo | QR-CBC51 | max. 50 W**

- ☒ wallarm spotlight available with different wall fastenings
- ☒ light head pivotable
- ☒ easy relamping
- ☒ housing and wallarm rod made from anodised aluminium (chrome matt), luminaire holder made from heat-resistant polycarbonate (black)
- ☒ transformer to be ordered separately, if necessary
- ☒ use IRC lamps only up to 35 W
- ☒ protection class III applies only in combination with suitable transformer

120V 12V 60Hz IP20 CE Page700




LM	Wattage	Fastening included	Order No.	⚡	lb
☒ QR-CBC 51 / GU5.3	max. 50 W	I	NAA 5040.1	Transformer incl.	1.1
		II	NAA 5040.2		1.1
		III	NAA 5041		0.9
		IV	NAA 5043		0.9
		V	NAA 5047		0.9

**NAA Roy I | QR-CBC51 | max. 50 W**

- ☒ wallarm spotlight available with different wall fastenings
- ☒ light head pivotable via tilting and swivel joint
- ☒ easy relamping
- ☒ housing and wallarm rod made from high-grade aluminium
- ☒ transformer to be ordered separately, if necessary
- ☒ use IRC lamps only up to 35 W
- ☒ protection class III applies only in combination with suitable transformer
- ☒ color: chrome matt

120V 12V 60Hz IP20 CE Page700




LM	Wattage	Fastening included	Order No.	⚡	lb
☒ QR-CBC 51 / GU5.3	max. 50 W	I	NAA 5000.1	Transformer incl.	1.1
		II	NAA 5000.2		1.1
		III	NAA 5001		0.9
		IV	NAA 5003		1.1
		V	NAA 5007		1.1

**NAA Roy II | QR-CBC 51 | max. 50 W**

- ☒ wallarm spotlight available with different wall fastenings
- ☒ double articulated wallarm
- ☒ light head pivotable via tilting and swivel joint
- ☒ easy relamping
- ☒ housing and wallarm rod made from high-grade aluminium
- ☒ transformer to be ordered separately, if necessary
- ☒ use IRC lamps only up to 35 W
- ☒ protection class III applies only in combination with suitable transformer
- ☒ color: chrome matt

120V 12V 60Hz IP20 CE Page700

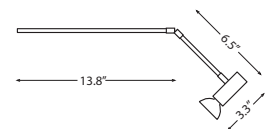


LM	Wattage	Fastening included	Order No.	⚡	lb
☒ QR-CBC 51 / GU5.3	max. 50 W	I	NAA 5010.1	Transformer incl.	1.1
		II	NAA 5010.2		1.1
		III	NAA 5011		1.1
		IV	NAA 5013		1.1
		V	NAA 5017		1.1



**NAA Roy III | QR-CBC 51 | 2 x max. 50 W**

120V 12V 60Hz	IP20	CE	Page 700
---------------------	------	----	----------

- ☒ wallarm spotlight available with different wall fastenings
- ☒ light heads pivotable via tilting and swivel joint
- ☒ easy relamping
- ☒ housing and wallarm rod made from high-grade aluminium
- ☒ transformer to be ordered separately, if necessary
- ☒ use IRC lamps only up to 35 W
- ☒ protection class III applies only in combination with suitable transformer
- ☒ colour: chrome matt




LM	Wattage	Fastening included	Order No.	lb
☒ QR-CBC 51 / GU 5.3	2 x max. 50 W	I	<a href="#">NAA 5020.1</a>	1.5
		II	<a href="#">NAA 5020.2</a>	1.5
		III	<a href="#">NAA 5021</a>	1.5
		IV	<a href="#">NAA 5023</a>	1.5

**Fastenings | for low-voltage wallarm luminaires**




**Fastening I**  
fastening clamp, aluminium anodised  
span range 0.1" - 1.4"  
retrofitting of transformer without tools possible

**L 30.1**




**Fastening II**  
fastening clamp, aluminium anodised  
span range 0.7" - 1.0"

**L 30.2**




**Trafo Clipo-System**  
simply screw on without the use of tools, aluminium anodised,  
connection wire 78.7"  
Euro plug


**NAA 7000** electronic transformer 105 VA



**Fastening III**  
direct fastening to be screwed on  
span range up to max. 1.0"



**Fastening IV**  
ceiling rose for screwing on



**Fastening V**  
surface mounted Monopoint to be hinged on integral electronic transformer 50 VA  
connection wire 78.7"  
Euro plug



# solavanti lighting



SOLAVANTI LIGHTING, LLC

Dallas, Texas

Tel.: 1.866.356.4458

Fax: 1.866.516.1924

[www.solavantilighting.com](http://www.solavantilighting.com)