


# Pendant Luminaires



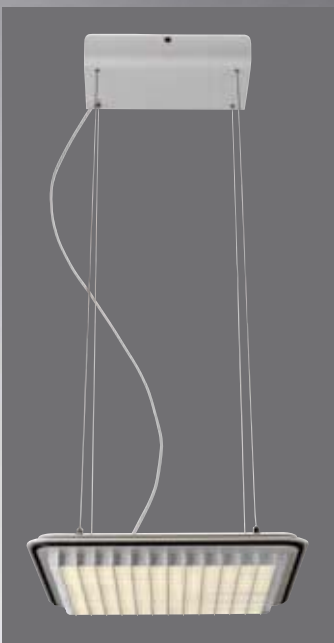

## Screen Pendel LED | 3000 lm

### Pendant Luminaire

- LED pendant luminaire
- light colour in warm-white or neutral-white
- luminaire made from high-grade aluminium
- passive heat sink
- power supply unit integrated in canopy
- *height adjustable steel cord suspension 4-fold*
- color: white

120V  
60 Hz

⊕  
IP20

⚡  
CE

| LM  | Wattage | Luminous flux | Light color                 |  | OrderNo.   |
|---|---------|---------------|-----------------------------|---|--|
|  LED | 36 W    | 3000 lm       | warm-white<br>neutral-white | 3200 K<br>4200 K  | <a href="#">SRLED 350.3032</a><br><a href="#">SRLED 350.3042</a> |



## Poox 510 | 600 lm

### Pendant Luminaire



PRI PLUS



RGB

120V  
60 Hz

IP20





CE

- LED pendant luminaire, illuminated glass diffuser in RGB to be addressed via control unit / pushbutton
- direct light part: light colour warm-white or neutral-white
- moulded cristal glass with conical design
- PRI PLUS specular reflector
- passive heat sink
- surface-mounted version: converter/controller integrated in canopy
- *height adjustable steel cord suspension (length 59.1")*

Poox 500 RGB





|  | LM  | Wattage | Luminous flux | Beam angle | Light color                 | Color temperature | OrderNo.   |
|--|-----|---------|---------------|------------|-----------------------------|-------------------|--|
| <b>Surface-mounted without RGB accent illumination</b> |     |         |               |            |                             |                   |  |
| 🔔  | LED | 10 W    | 600 lm        | 40°        | warm-white<br>neutral-white | 3000 K<br>4100 K  | <a href="#">POOX 500.1034</a><br><a href="#">POOX 500.1044</a> |
| <b>Surface-mounted with RGB accent illumination</b>    |     |         |               |            |                             |                   |  |
| 🔔  | LED | 10 W    | 600 lm        | 40°        | warm-white<br>neutral-white | 3000 K<br>4100 K  | <a href="#">POOX 505.1034</a><br><a href="#">POOX 505.1044</a> |
| <b>Recess without RGB accent illumination</b>          |     |         |               |            |                             |                   |  |
| 🔔  | LED | 10 W    | 600 lm        | 40°        | warm-white<br>neutral-white | 3000 K<br>4100 K  | <a href="#">POOX 510.1034</a><br><a href="#">POOX 510.1044</a> |
| <b>Recess with RGB accent illumination</b>             |     |         |               |            |                             |                   |  |
| 🔔  | LED | 10 W    | 600 lm        | 40°        | warm-white<br>neutral-white | 3000 K<br>4100 K  | <a href="#">POOX 515.1034</a><br><a href="#">POOX 515.1044</a> |





## LE 10 / LE 12 | 4.5 W

### Pendant Luminaire



- ☑ LED pendant luminaire with homogenous lighting, chromatic spectrum RGB
- ☑ ceiling fastening selectable: ceiling socket or ceiling mounting plate
- ☑ opal acrylic block made from PMMA
- ☑ mounting plates and pendant rod made from aluminium
- ☑ *pendant length: 39.4", Ø = 0.3", height adjustable*
- ☑ power supply & control unit and potentiometer to be ordered separately
- ☑ *luminaire inclusive data and control cable 0.2" x 0.01 in<sup>2</sup>, ready for connection, length: 157.5"*
- ☑ color: silver

RGB

24 V  
DC

IP20

CE

| LM  | Wattage | attachment | Fastening     | Lightcolor | Order No. | lb  |
|---|---------|------------|---------------|------------|-----------|-----|
|   | LED     | 4.5 W      | attachment 8  | RGB        | LE 10.100 | 3.1 |
|   |         |            | attachment 10 | RGB        | LE 10.101 | 3.3 |
|  | LED     | 4.5 W      | attachment 8  | RGB        | LE 12.100 | 3.1 |
|   |         |            | attachment 10 | RGB        | LE 12.101 | 3.3 |

#### Accessories

- [1] Power supply unit LE 50.100  
 [2] Potentiometer buried for colour setting LE 51.100



[1]



[2]



attachment 8

Ceiling socket with fixing clasp for continuous height adjustment

Color: alu



attachment 10

Ceiling fastening plate  
Color: silver

Extraordinary projects require  
extraordinary lighting designs.

Challenge us!

Individually designed luminaires are our  
profession. Our flexibility and capability  
guarantee the realization of customers'  
requirements.

Hymer Museum , Bad Waldsee










Planung: Bauart Liebel | Kiess Planungs GmbH, Bad Waldsee

Generalunternehmer: i+ RB Schertler-Alge-Bühler GmbH, Lauterach

Installation + E-Planung: I-TEC Industrieelektrik GmbH, Lauterach / ib-Brugger, Thüringen





|   |  |
|---|--|
| LM  | light source                             |
| Wattage   | wattage                                  |
| Luminous flux   | luminous flux                            |
| Light color   | light color                              |
| Order No.   | order number                             |
| DS  | ceiling thickness                        |
| ET  | recessed depth                           |
|    | diameter/inner diameter/luminaire square |
|    | diameter/inner diameter/luminaire round  |
|    | RGB light source available               |
|    | color temperature (Kelvin)               |
|    | beam angle                               |
|  | cut-out in inches                        |
|  | adapter for contact track                |
|  | PRI/PRI PLUS technology                  |
|  | digital adressable lighting interface    |

# Legend



**solavanti** lighting **PERFORMANCE**<sup>10</sup>

SOLAVANTI LIGHTING, LLC

Dallas, Texas

Tel.: 1.866.356.4458

Fax: 1.866.516.1924

[www.solavantilighting.com](http://www.solavantilighting.com)

Technical Data are subject to change | Errors and omissions excepted | Color deviations are subject to printing | Solavanti Lighting LLC